
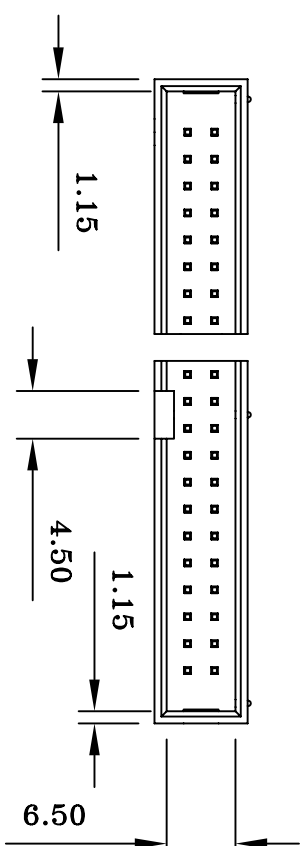
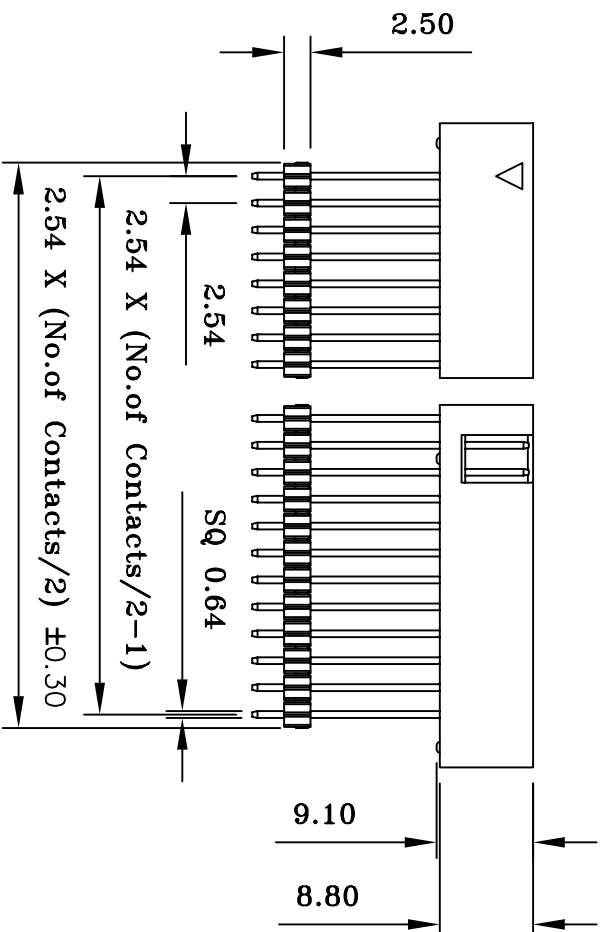
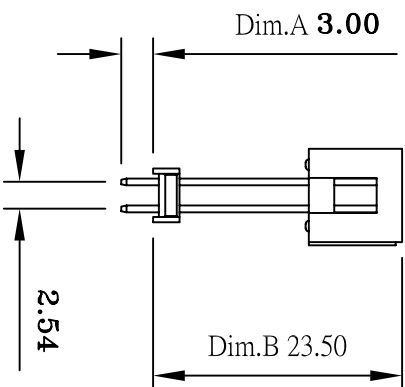


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +85° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT


Finish: Gold Plated or Duplex Plated
 Standard: Gold Flash all over

Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area

Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds



Recommended P.C. Board Hole Layout

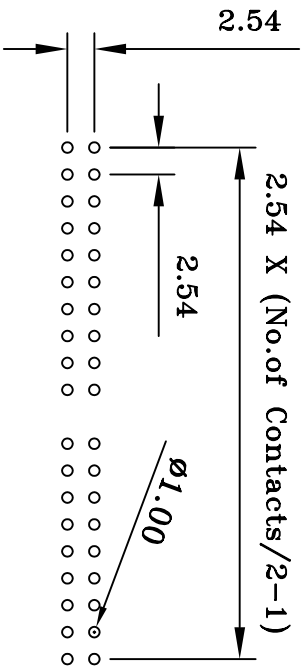

(RoHS Compliant)

BH11 X X - XX S0 BK X D01 D
 1 2 3 4 5 6 7 8

- Insulator Material:
 A= P.B.T
 N= Nylon-6T
 B= Phosphor Bronze
 C= Brass
 Circuits: 06~64 pin
 Tail Style:
 S0= Straight
 5. Color: BK=Black
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash, Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u", Matte Tin 100u"
 D=Gold 5u"
6. Contact Plated:
 E=Gold 5u", Matte Tin 100u"
 G=Gold 10u"
 H=Gold 10u", Matte Tin 100u"
 J=Gold 15u"
 K=Gold 15u", Matte Tin 100u"
 L=Gold 30u"
 M=Gold 30u", Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u", Matte Tin 100u"
 7. Special Options
8. Packing: D=Box



CONN TOP
 COMPONENT INC.

©:BH11XX-XXS0BKXD01-2007/05/24-C

1: BH11X-XXBKHD		DRAWING NO		BH-00118		EDITION: C1		.X ±0.3		.XX ±0.20		.XXX ±0.100	
2: HXX25-2XXXBKHD		DRAWN BY		GARY		2008/04/10		SCALE: 1:1		ITEM: BH		UNIT: m.m	
3: QT-0.64X17.60BN		APPROVAL BY											
TEL:(02)86481727 FAX:(02)86482427													