

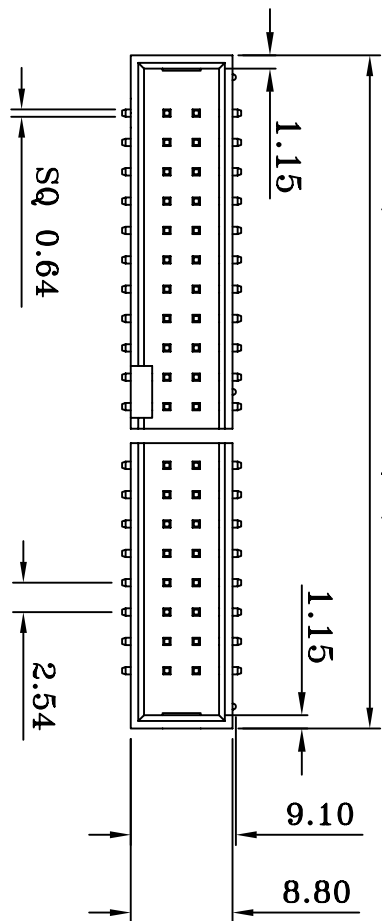



2.54 X (No.of Contacts/2)+7.5 ±0.30

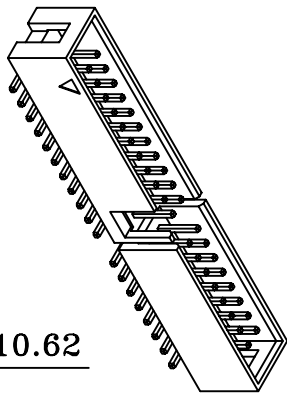


4.50 (6P=2.50mm)

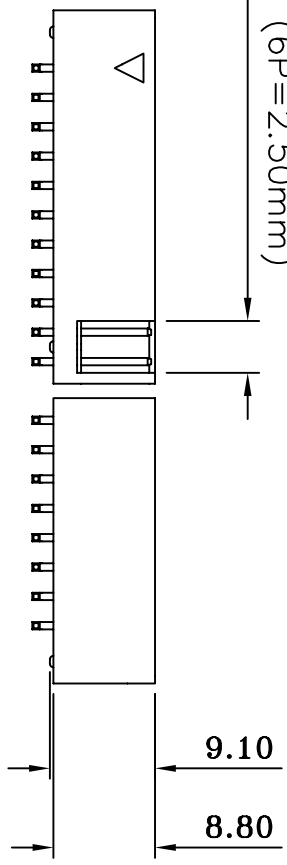

Dim.B 10.62

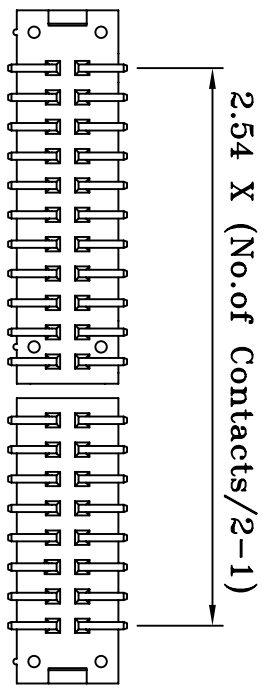

Dim.A 10.30

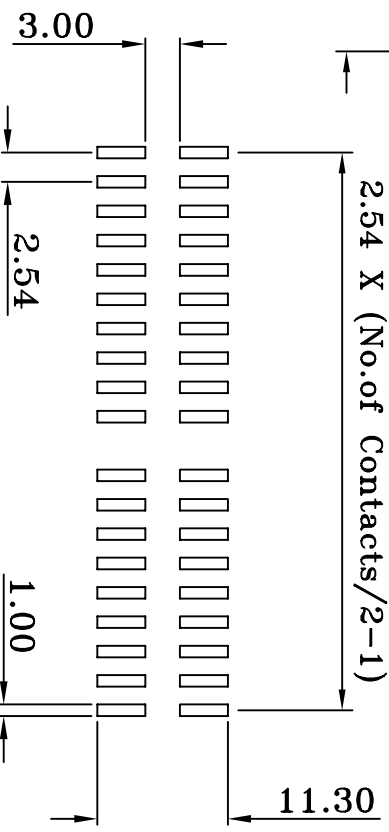

Recommended P.C. Board  
SMD Layout

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20m ohms max.
- Dielectric Withstanding: 1000V AC
- Operating Temperature: -40° ~ +105° C
- Max Processing Temp: 230° C for 60 seconds
- Contact Material: Copper Alloy
- Insulator Material: Polyester; UL 94V-0
- Standard: Nylon-6T
- Finish: Tin, Gold Plated
- Standard: Gold Flash all over

(RoHS Compliant)

BH11N X - XX D0 BK X 000 X

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

1. Insulator Material:
  - N= Nylon-6T
  - A=Phosphor Bronze
  - B= Brass
  - 3. Circuit: 06~50pin
  - 4. Tail Style: D0= S.M.D W/O Peg
  - 5. Color: BK=Black
6. Contact Plated:
  - T=Matte Tin over Nickel
  - W=Matte Tin over Nickel 150u"
  - Y=Bright Tin over Nickel
  - C=Gold Flash
  - F=Gold Flash,Matte Tin 100u"
  - A=Gold 3u"
  - B=Gold 3u",Matte Tin 100u"
  - D=Gold 5u"
  - E=Gold 5u",Matte Tin 100u"
  - G=Gold 10u"
  - J=Gold 10u",Matte Tin 100u"
  - L=Gold 15u"
  - M=Gold 15u",Matte Tin 100u"
  - U=Gold 30u"
  - V=Gold 30u",Matte Tin 100u"
7. Special Options
  - B = Tube
  - C = Tray
  - N = Tap & Reel
8. Packing:

②: Circuits: 06~64 pin-2008/04/07-C1

①: BH11NX-XXD0BKX000-2007/05/09-C

CONN TOP COMPONENT INC.

BOM 1: BH11N-XXBKH0

2: QT-0.64X13.50BN

3: 0

TEL:(02)86481727 FAX:(02)86482427

PART NO	BH11NX-XXD0BKX000X	X	.XX	.XXX
DRAWING NO	BH-00109	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C2	ITEM: BH	
APPROVAL BY		2008/11/14	SCALE: 1:1	
			UNIT: m.m	