


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT






Finish: Gold Plated or Duplex Plated
 Standard: Gold Flash all over

Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area

Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

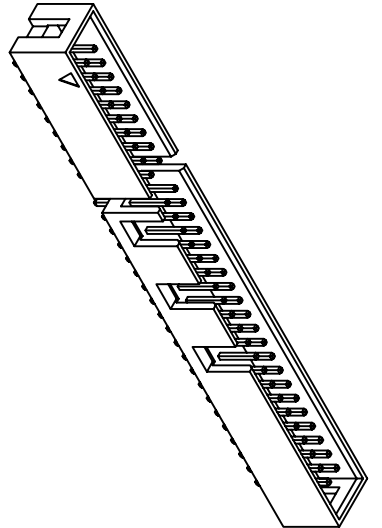

**Recommended P.C. Board
 Hole Layout**

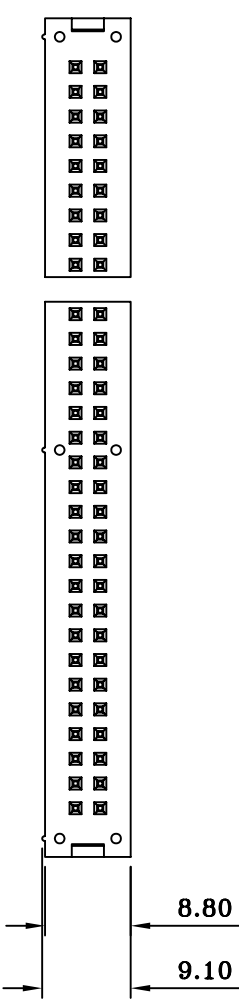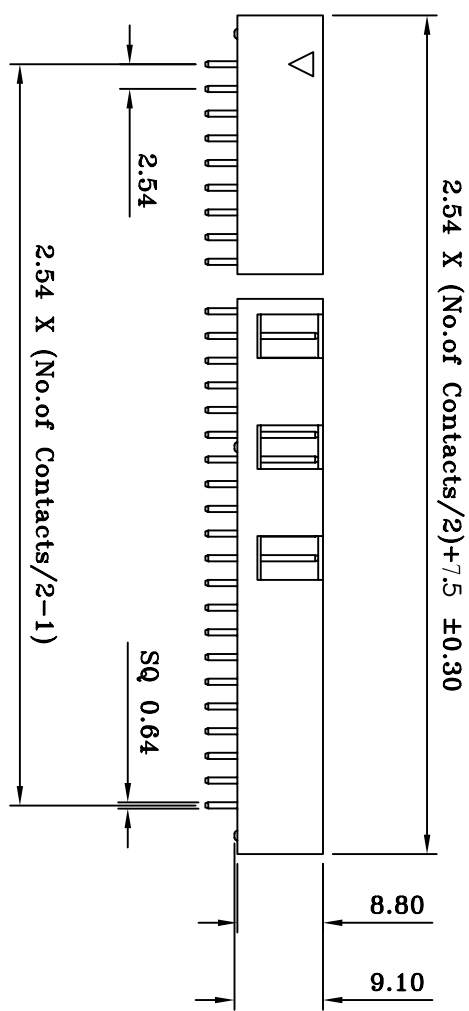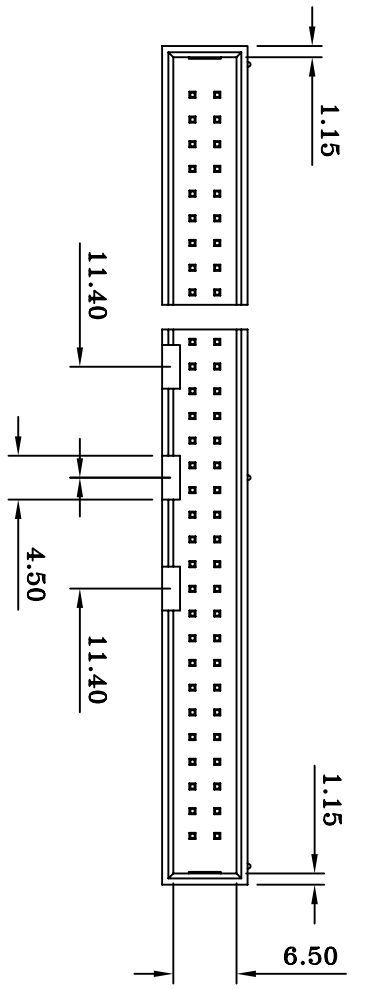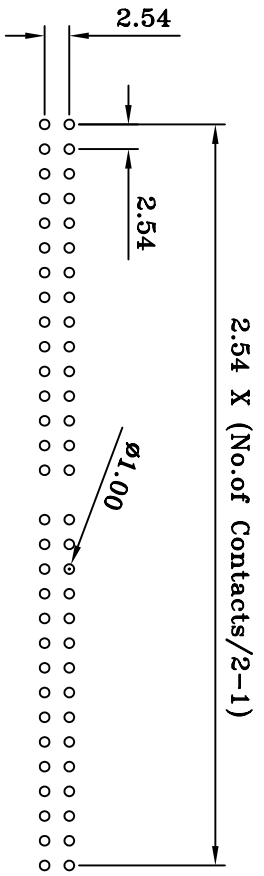

(RoHS Compliant)
 BH11 X X - 6X S0 BK X 000 C
 1 2 3 4 5 6 7 8

- Insulator Material:
 - A= P.B.T
 - N= Nylon-6T
 - A=Phosphor Bronze
 - B= Brass
 - 3. Circuits: 60--64 pin
 - 4. Tail Style:
 - S0= Straight
 - 5. Color: BK=Black
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash,Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Matte Tin 100u"
 - D=Gold 5u"
- Special Options
 - E=Gold 5u",Matte Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u",Matte Tin 100u"
 - I=Gold 15u"
 - M=Gold 15u",Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u",Matte Tin 100u"
 - 7. Special Options
 - 8. Packing: C=Tray

①Circuits: 06-64 pin-3008/10/23-C			
PART NO		BH11XX-6XS0BKX000C	
DRAWING NO		BH-00154	
DRAWN BY		LIN	
EDITION:		C1	
SCALE:		1:1	
ITEM:		BH	
UNIT:		m.m	
TEL:(02)86481727		FAX:(02)86482427	
APPROVAL BY			