


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 1000V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

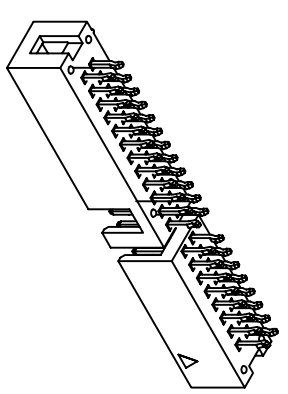

Recommended P.C. Board Hole Layout

(RoHS Compliant)

BH11 N X - XX SK BK X 001 C
 1 2 3 4 5 6 7 8

- Insulator Material:
 N= Nylon-6T
 A=Phosphor Bronze
 B= Brass
 Circuits: 06 ~ 50pin
 TaIII Style:
 SK= Straight W/Kink
 BK=Black
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u",Matte Tin 100u"
 B=Gold 3u",Matte Tin 100u"
 D=Gold 5u"
- E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
- Special Options
- Packing: C=Tray

①: Circuits: 06-64 pin-2008/04/11-C1 ②: BH11NX-XXSKBKX001-2007/05/24-C				PRT NO BH11NX-XXSKBKX001C		.X ±0.3		.XXX ±0.100	
1: BH11N-XXBKHX0 2: QT-0.64X13.00BN 3:		DRAWING NO BH-00071		EDITION: C2		ITEM: BH		SCALE: 1:1 UNIT: m.m	
TEL:(02)86481727 FAX:(02)86482427		DRAWN BY GARY		2008/11/14		APPROVAL BY			