
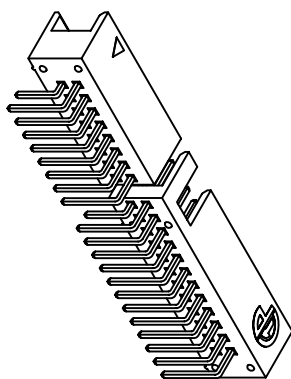
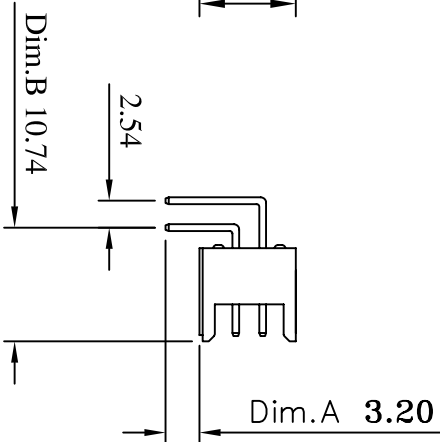
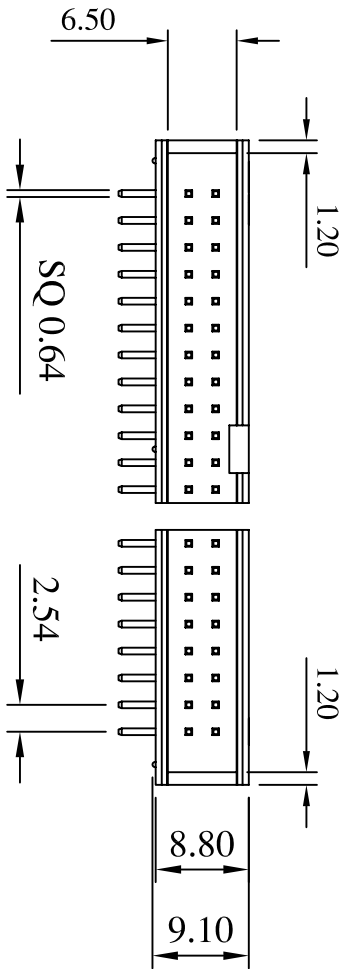


2.54 X No. of Contacts/2+7.5 ±0.30

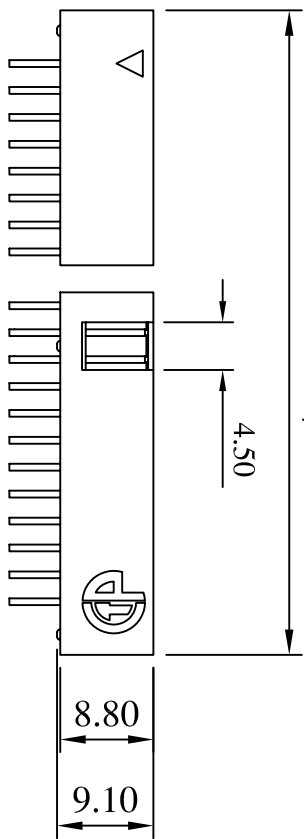

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +85° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester; UL 94V-0
 Standard: PBT



Finish: Gold Plated or Duplex Plated
 Standard: Gold Flash all over

Note:
 Duplex Plating: Gold Plated on contact area,

Insulator Material: Tin on solder area
 Polyester; UL 94V-0
 Standard: Nylon-6T

Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

Recommended P.C. Board
 Hole Layout

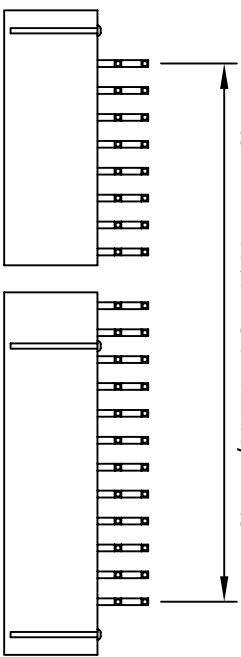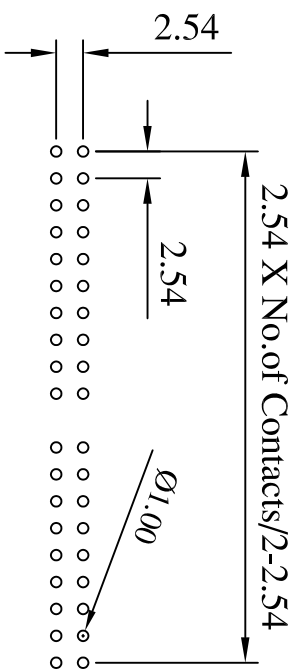

(RoHS Compliant)

1. Insulator Material:

6=P.B.T. CTP Logo

7= Nylon-6T CTP Logo

2. A=Phosphor Bronze

B= Brass

3. Circuits: 06 ~ 64pin

4. Tail Style:

R0= Right Angle

5. Color: BK=Black

6. Contact Plated:

T= Tin over Nickel

W= Matte Tin over Nickel 150u"

Y= Bright Tin over Nickel

C= Gold Flash

F= Gold Flash, Matte Tin 100u"

A= Gold 3u"

B= Gold 3u", Matte Tin 100u"

D= Gold 5u"

BH1U6 X - XX R0 BK X 000 C
 1 2 3 4 5 6 7 8

E= Gold 5u", Matte Tin 100u"
 G= Gold 10u"

J= Gold 10u", Matte Tin 100u"

L= Gold 15u"

M= Gold 15u", Matte Tin 100u"

U= Gold 30u"

V= Gold 30u", Matte Tin 100u"

7. Special Options

8. Packing: C = Tray



CONN TOP
 COMPONENT INC.

©:BH1U6X-XXR0BKX000-2007/09/14-C

PART NO

BH1U6X-XXR0BKX000C

X ±0.3

XX ±0.20
 XXX ±0.100

DRAWING NO

BH-00133

EDITION: C1

ITEM: BH

DRAWN BY

GARY

2008/04/02

SCALE: 1:1

APPROVAL BY

UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427

1: BH1U6-XXRBKH0

2: QT-0.64X16.00BN

3: QT-0.64X21.00BN