


(RoHS Compliant) BH1U 6 X - XX SO BK X 000 C

- Insulator Material:
6=P.B.T. CTP Logo
7= Nylon-6T CTP Logo
 - A=Phosphor Bronze
B= Brass
 - Circuits: 06 ~ 64pin
 - Taill Style: S0= Straight
 - Color: BK=Black
BU= Blue
WB= Walther Blue
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
C=Gold Flash
F=Gold Flash,Matte Tin 100u"
A=Gold 3u"
B=Gold 3u",Matte Tin 100u"
D=Gold 5u"
 - E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
J=Gold 10u",Matte Tin 100u"
L=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u"
 - Special Options
8. Packaging: C = Tray

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +85° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT

Finish: Gold Plated or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

Recommended P.C. Board
 Hole Layout

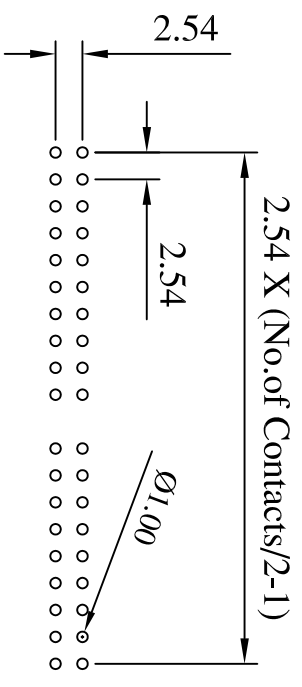

©:2008/04/02-C1		CONN TOP COMPONENT INC.	
①: BH1U6X-XXS0BKX000-2007/05/03-4C		DRAWING NO BH-00105	
②: 0		DRAWN BY GARY	
③: 0		EDITION: C2	
TEL:(02)86481727 FAX:(02)86482427		SCALE: 1:1	
		UNTT: m.m	