

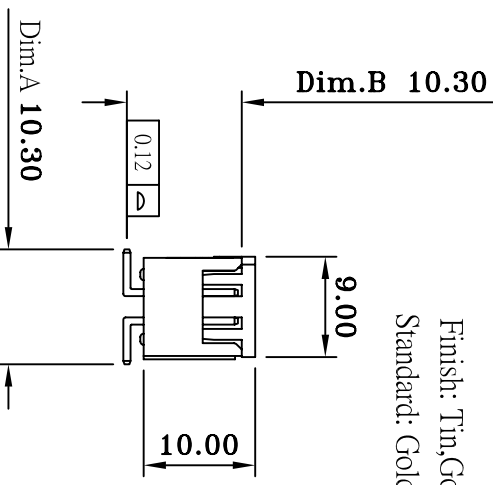
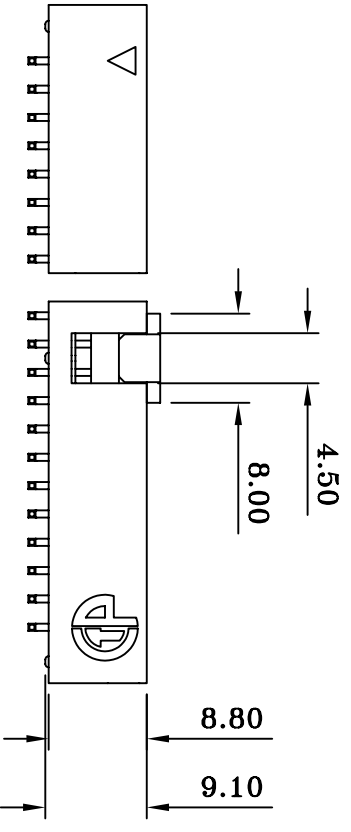
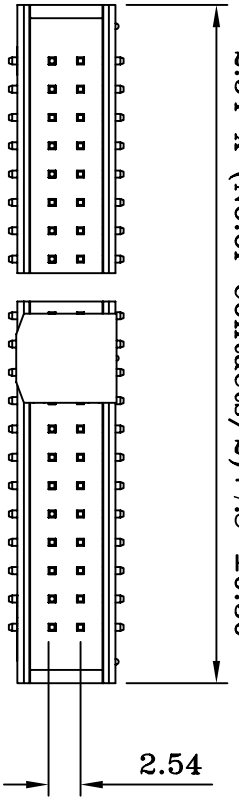
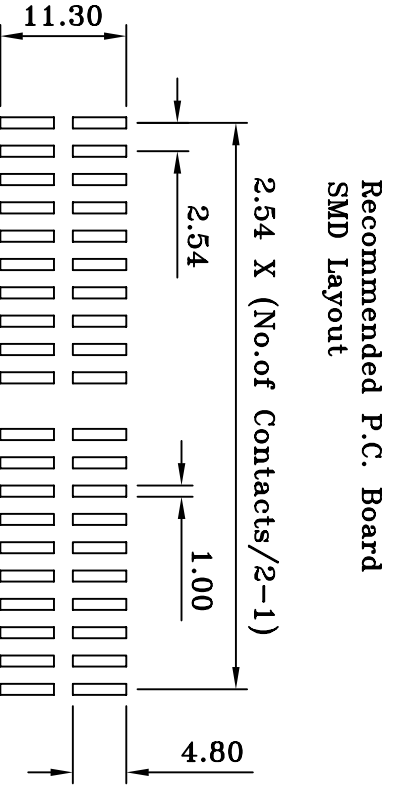


2.54 X (No. of Contacts/2)+7.5 ±0.30

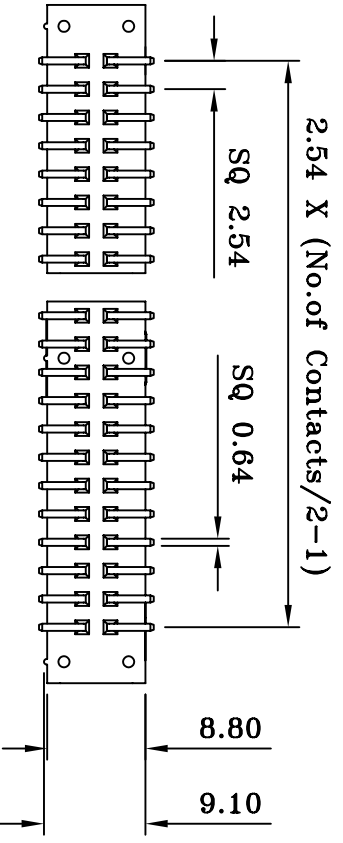


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: 1000V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

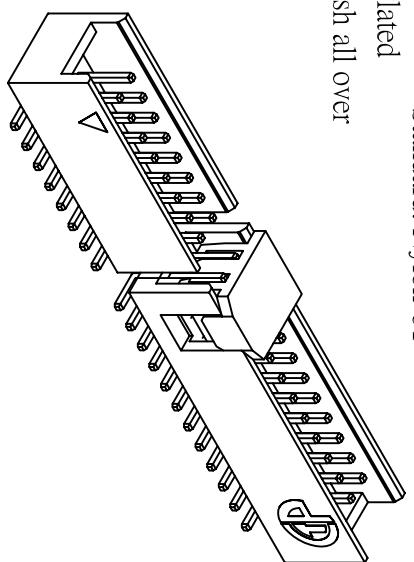

Recommended P.C. Board
 SMD Layout

(RoHS Compliant) BH1U 7 X - XX D0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material: 7=Nylon-6T CTP Logo
- A=Phosphor Bronze
B= Brass
- Circuits: 10-64pin
- Do= S.M.D W/O Peg
Color: BK=Black
WH=White
- Contact Plated: T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
- Special Options: D=Gold 5u"
E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
J=Gold 10u",Matte Tin 100u"
L=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u"
8. X= Packing
E = CAP + Tap
F = CAP + Tube
G = CAP + Tray
H = CAP + Bag

©:BH1U7X-XXD0BKX000P-2007/05/03-C			
 CONN TOP COMPONENT INC.		PART NO	BH1U7X-XXD0BKX000X
1:	BH1U7-XXBKH0	DRAWING NO	BH-00104
2:	QT-0.64X13.50BN	DRAWN BY	GARY
3:	CAP-H12-02	EDITION:	C1
TEL: (02)86481727 FAX: (02)86482427		APPROVAL BY	
X	±0.3	XX	±0.20
XXX	±0.100	ITEM:	BH
SCALE: 1:1		UNIT:	m.m