





(Dim.B) 6.00

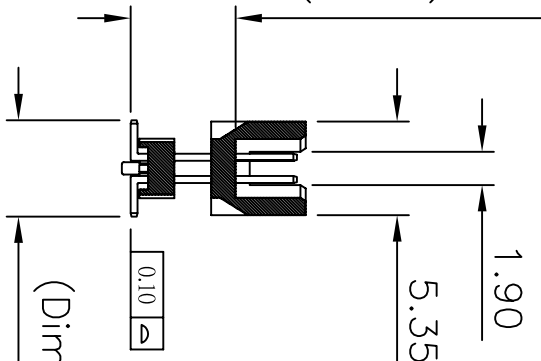

- Current Rating: 1 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: 500 V AC
- Operating Temperature: -40° ~ +105° C
- Max Processing Temp: 230°C for 60 seconds
- Max Processing Temp: 260° C for 10 seconds
- Contact Material: Copper Alloy
- Insulator Material: Polyester, UL 94V-0 Standard: Nylon-6T
- Finish: Gold Plated
- Standard: Gold Flash all over

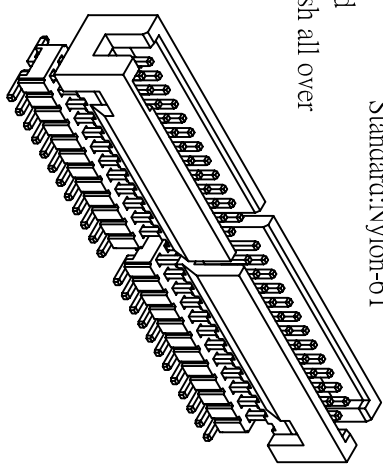

Recommended P.C. Board
SMD Layout

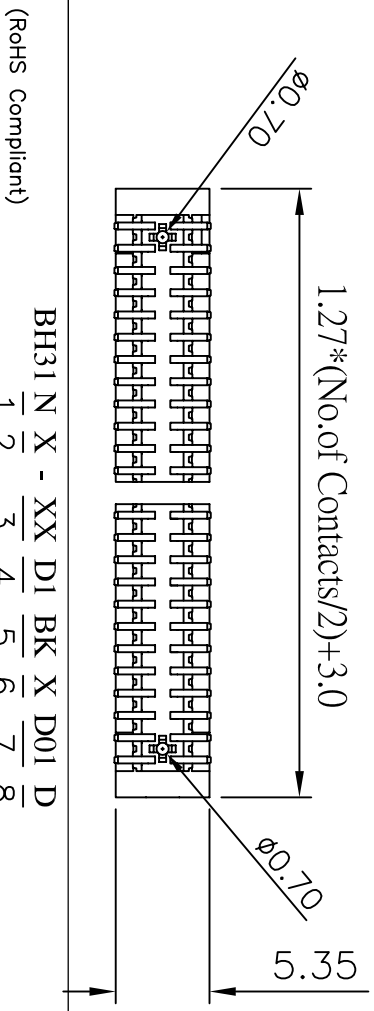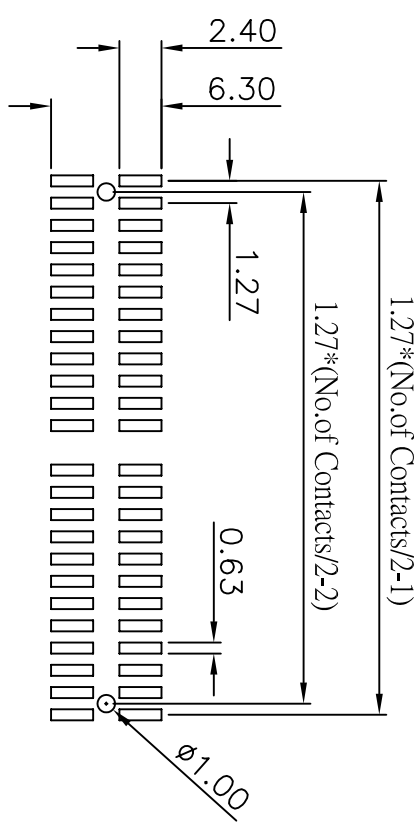

(RoHS Compliant)

1. Insulator Material: 3. Circuits: 06~100 pin 6. Contact Plated: 7. Special Options

N= Nylon-6T 4. Tail Style: 8. Packing: D=Box

2. A=Phosphor Bronze D1 = S.M.D With Peg Type

B= Brass 5. Color: BK=Black U=Gold 30u"

BH31N X - XX D1 BK X D01 D
1 2 3 4 5 6 7 8



CONN TOP
COMPONENT INC.

PART NO BH31NX-XXD1BKXD01D

X ±0.3
XX ±0.20
XXX ±0.100

1:	BH31N-XXBKH0
BOM 2:	QT-0.4X10.70BN
3:	H3X20-2XXBKHI

DRAWING NO	BD-00007
DRAWN BY	GARY
APPROVAL BY	

EDITION:	C1	ITEM:	BD
SCALE:	1:1	SCALE:	1:1
UNIT:	m.m	UNIT:	m.m

TEL:(02)86481727 FAX:(02)86482427