



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T
 Finish: Gold Plated
 Standard: Gold Flash all over

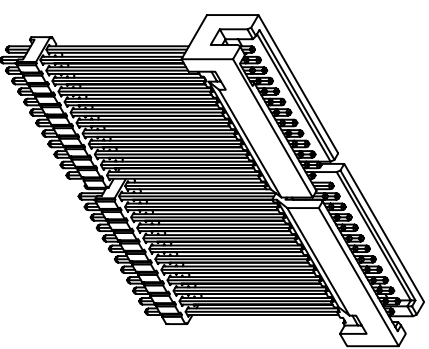

Recommended P.C. Board
 Hole Layout

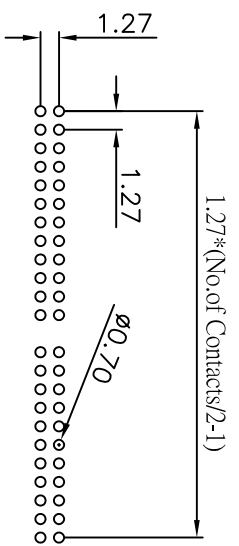

(RoHS Compliant) BH31 N X - XX S0 BK X D01 D
 1 2 3 4 5 6 7 8

- Insulator Material: N= Nylon-6T
- A=Phosphor Bronze
B= Brass
- Circuits: 06~100 pin
- Tail Style: S0= Straight
5. Color: BK=Black
- Contact Plated: C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options: D=Box

CONN TOP COMPONENT INC.

1:	BH31N-XXBKHD
BOM 2:	QT-0.4X25.40BN
3:	H3N20-2XXBKHD

TEL: (02)86481727 FAX: (02)86482427

PART NO	BH31NX-XXS0BKXD01D	X	.XX	.XXX
DRAWING NO	BD-00008	EDITION:	C1	ITEM: BD
DRAWN BY	GARY	2008/04/23	SCALE:	1:1
APPROVAL BY			UNIT:	m.m