

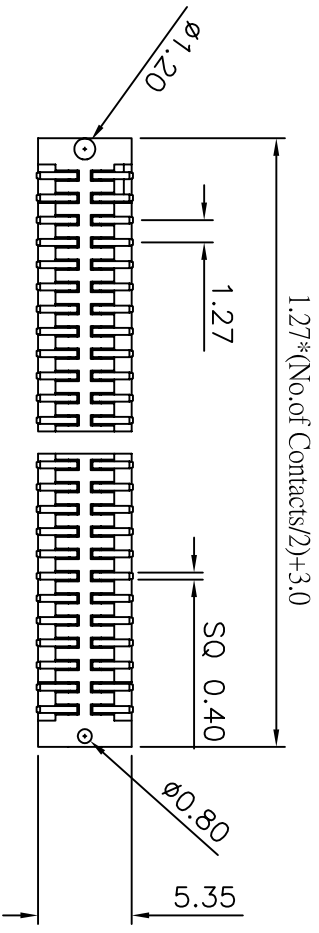


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230°C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Gold Plated
 Standard: Gold Flash all over

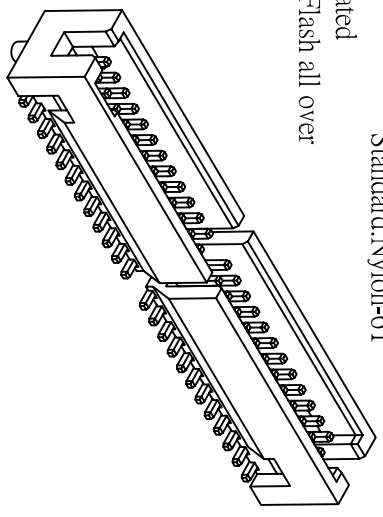

BH31 N X - XX D1 BK X 000 X
 1 2 3 4 5 6 7 8

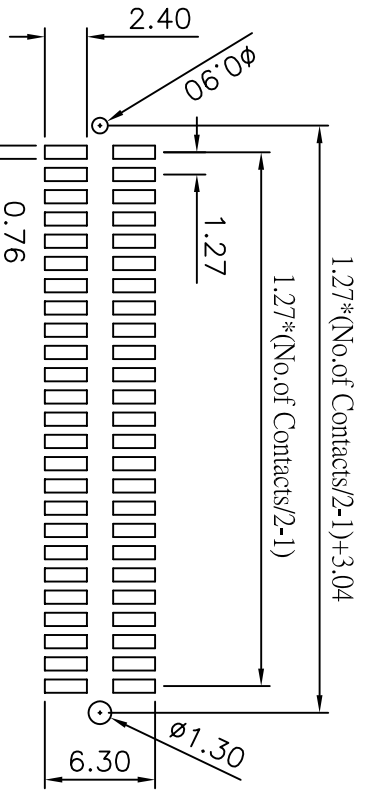

Recommended P.C. Board
 SMD Layout

- Insulator Material:
N = Nylon-6T
- A=Phosphor Bronze
B = Brass
- Circuits: 06~100 pin
- Taill Style:
D1 = S.M.D With Peg Type
5. Color: BK=Black
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options
B = Tube
C = Tray
N = Tap & Reel

		CONN TOP COMPONENT INC.	
1:	BH31N-XXBKHI	PART NO	BH31NX-XXD1BKX000X
2:	QT-0.4X6.30BN	DRAWING NO	BD-00002
3:	0	DRAWN BY	LIN
TEL: (02)86481727 FAX: (02)86482427		EDITION:	C1
		SCALE:	1:1
		ITEM:	BD
		UNIT:	m.m