



Recommended P.C. Board
SMD Layout

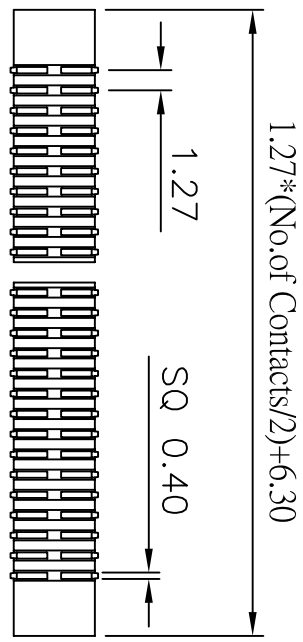

(RoHS Compliant)
(Halogen-Free)

BH32L X - XX D0 BK X 000 X
1 2 3 4 5 6 7 8

- Insulator Material:
L= L.C.P.
- A=Phosphor Bronze
B= Brass
- Circuits: 06~100 pin
- Toill Style:
D0=SMD No Peg Type
5. Color: BK=Black
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options
8. Packing:
B= Tube
C= Tray
N= Top & Reel

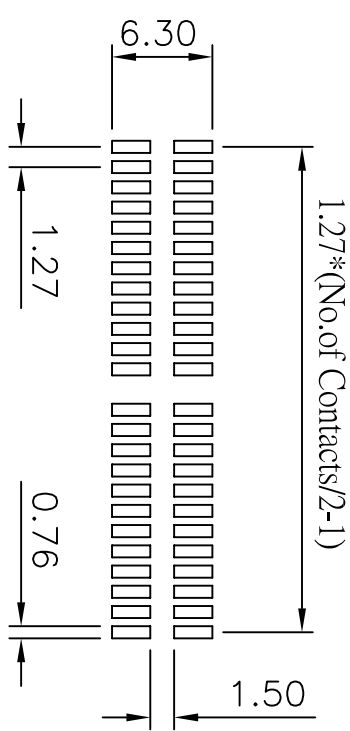

		PART NO BH32L X-XXD0BKX000X		X ±0.3	
1: BH32L-XXBKH0 2: QT-0.4X7.00BN 3: 0		DRAWING NO BD-00012		.XX ±0.20	
TEL: (02)86481727 FAX: (02)86482427		DRAWN BY LIN		EDITION: C1 2008/04/24	
		APPROVAL BY		ITEM: BD SCALE: 1:1 UNIT: m.m	

- Current Rating: 1 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: 500 V AC
- Operating Temperature: -40 ~ +125° C
- Max Processing Temp: 230° C for 60 seconds
- Max Processing Temp: 260° C for 10 seconds
- Contact Material: Copper Alloy
- Insulator Material: Polyester; UL 94V-0
- Standard: L.C.P
- Finish: Gold Plated
- Standard: Gold Flash all over