


Recommended P.C. Board  
Hole Layout

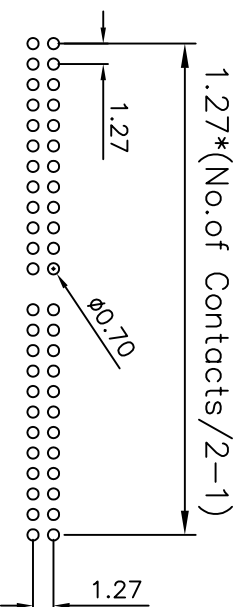

Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +125° C  
 Max Processing Temp: 230°C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: I.C.P

Finish: Gold Plated  
 Standard: Gold Flash all over

- (RoHS Compliant)  
(Halogen-Free)
- BH32 L X - XX SQ BK X 000 X
1. Insulator Material: BH32 L X - XX SQ BK X 000 X
2. A=Phosphor Bronze  
B= Brass
3. Circuits: 06~100 pin
4. Tail Style: SQ 0.40
5. Color: BK=Black
6. Contact Plated: C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
7. Special Options: B= Tube  
C= Tray  
N= Tap & Reel
8. Packing: B= Tube  
C= Tray  
N= Tap & Reel

②:Dim.A 2.30

①:Dim.A 2.80-2008/04/24-C1  
 ②: BH32LX-XXSQBKX000-2007/05/08-C

CONN TOP COMPONENT INC.

BOM 1: BH32L-XXBKX0  
 2: QT-04X7.50BN  
 3: 0

TEL: (02)86481727 FAX: (02)86482427

PART NO	BH32LX-XXSQBKX000X	X	.XX	.XXX
DRAWING NO	BD-00014	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C2	SCALE: 1:1	ITEM: BD
APPROVAL BY				UNIT: m.m