


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contract Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Gold Plated
 Standard: Gold Flash all over

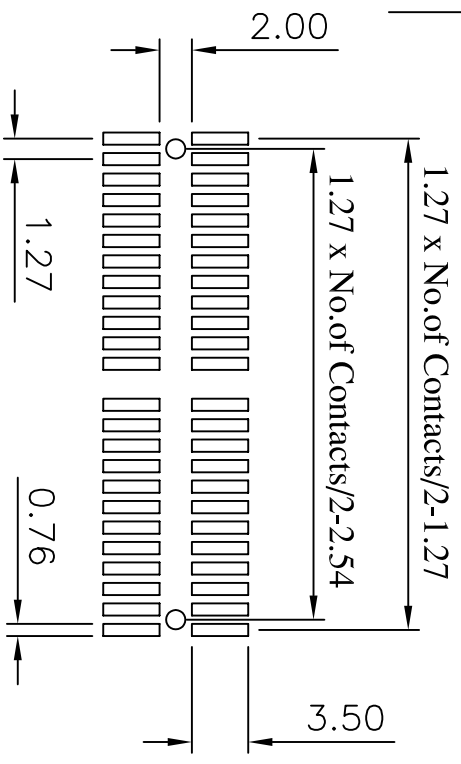

(RoHS Compliant) BH41 N X - XX D1 BK X 000 X

- Insulator Material: Nylon-6T
- A=Phosphor Bronze
- Circuits: 10~100 pin
- Taill Style: D1=S.M.D With Peg Type
- Contact Plated: C=Gold Flash, A=Gold 3u", D=Gold 5u", G=Gold 10u", L=Gold 15u", U=Gold 30u"
- Special Options: 8. Packing: B= Tube, C= Tray, N= Top & Reel



CONN TOP COMPONENT INC.		PART NO	BH41NX-XXXD1BKX000X	X	±0.3	.XX	±0.20	.XXX	±0.100
1:	BH41N-XXBKHI	DRAWING NO	BH-00148	EDITION:	C	ITEM:	BH	SCALE:	1:1
2:	QT-0.46X8.50BN	DRAWN BY	GARY		2008/05/07				
3:	0	APPROVAL BY							UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427