


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230°C for 60 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: I: LCP

Finish: Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

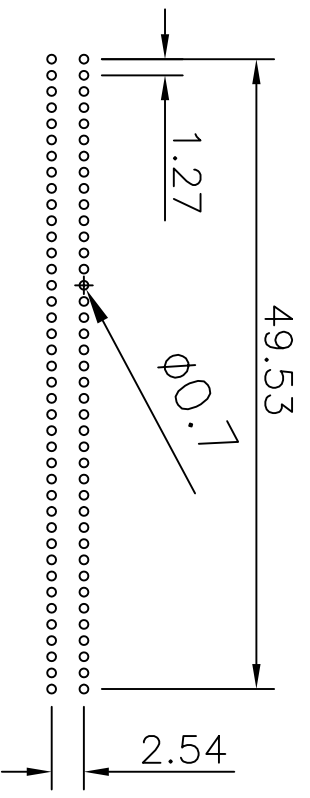

(RoHS Compliant) BH45 L A - 80 S0 BK F 000 C
 1 2 3 4 5 6 7 6

- Insulator Material: 6. Contact Plated:
 L=L.C.P.
 A=Phosphor Bronze
 B= Brass
 C=Circuits: 80 pin
 4. Tail Style:
 S0= Straight
 5. Color: BK=Black
7. Special Options
 D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
8. Packaging
 C= Tray

①: BH45LA-80S0BK F000-2007/06/07-C		CONN TOP COMPONENT INC.		PART NO	BH45LA-80S0BK F000C	.X	±0.3	.XX	±0.20	.XXX	±0.100
BOM 1: BH45L-80BK H0		DRAWING NO		BD-00004	EDITION: C1	ITEM:	BD				
BOM 2: QTP-0.4X 8.00BN		DRAWN BY		GARY	2009/02/18	SCALE:	1:1				
BOM 3: 0		APPROVAL BY				UNIT:	m.m				
TEL: (02)86481727 FAX: (02)86482427											