

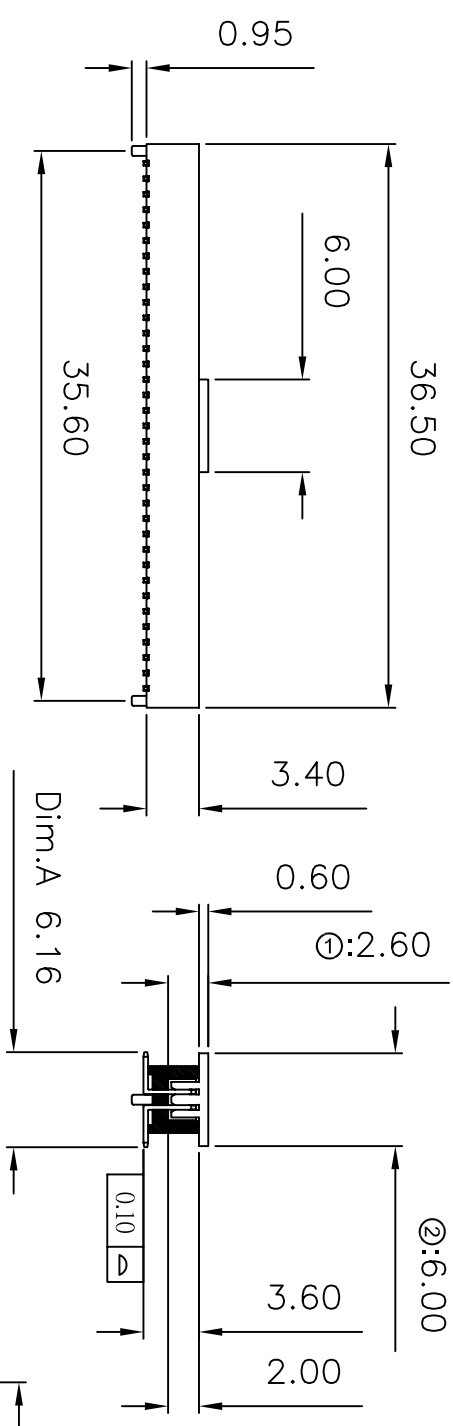


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: 300 V AC
 Contact Resistance: 20 m ohms max
 Operating Temperature: -40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0 Standard: LCP

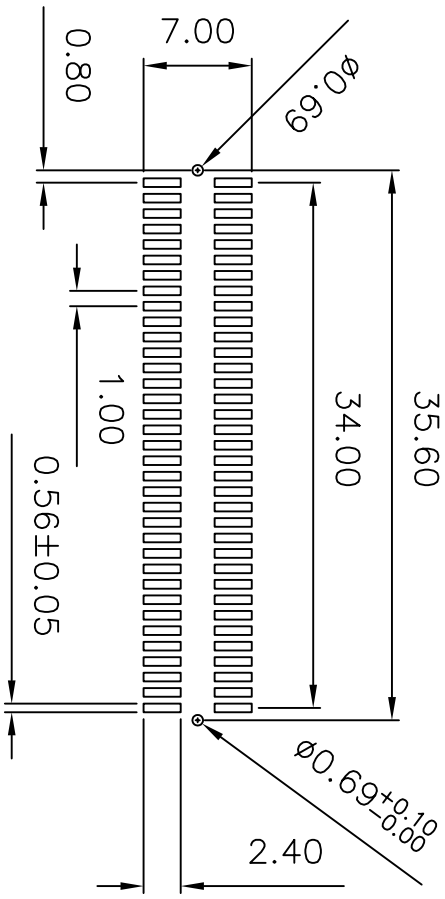

Recommended P.C. Board
SMD Layout

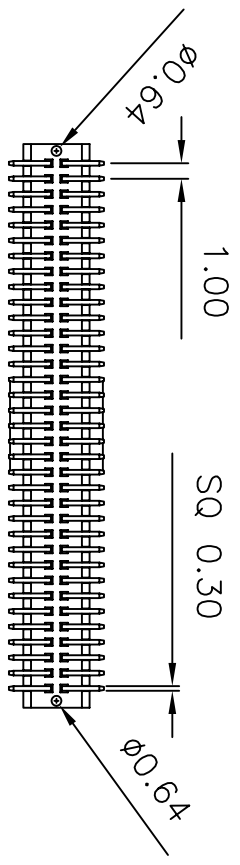

(RoHS Compliant)
(Halogen-Free)

BH51 L - 70 D1 BK C 000 F
1 2 3 4 5 6 7

- Insulator Material: L = L.C.P.
- Circuits: 70 pin
- Toll Style: D1=SMD With Peg Type
- Color: BK=Black
- Contact Plated: C=Gold Flash
- Special Options
- Packaging: F = CAP + Tube



②:3.18-2009/04/27-C	PART NO	BH51L-70D1BK000F	.X	.XX	.XXX
①:4.90--2009/04/27-C	DRAWING NO	BH-00161	±0.3	±0.20	±0.100

1: BH51L-70BKHI	DRAWN BY	GARY	EDITION: C1	SCALE: 1:1	ITEM: BH
2: QT-0.30X5.80BN	APPROVAL BY		2009/06/08		
3: CAP-H52-02					UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427