

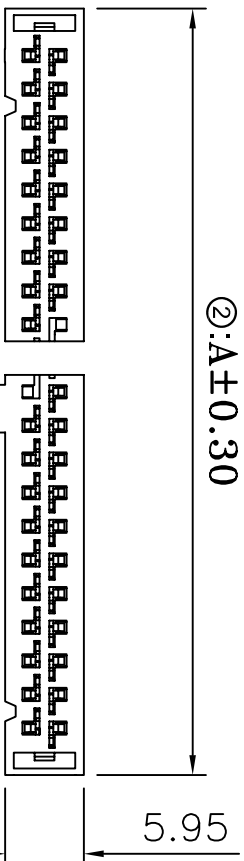



②:A±0.30

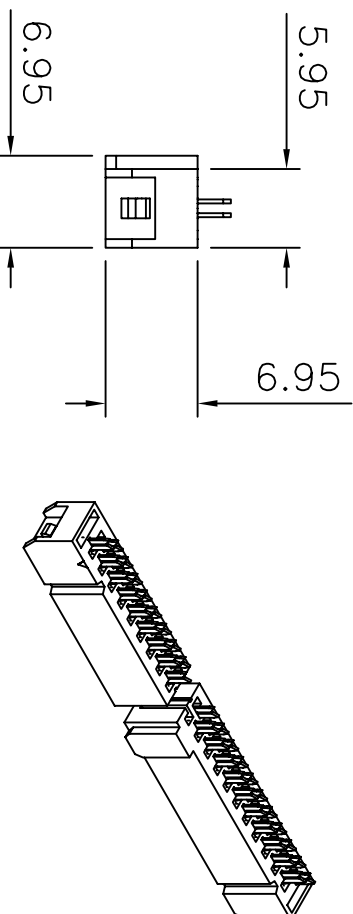

②:A±0.30

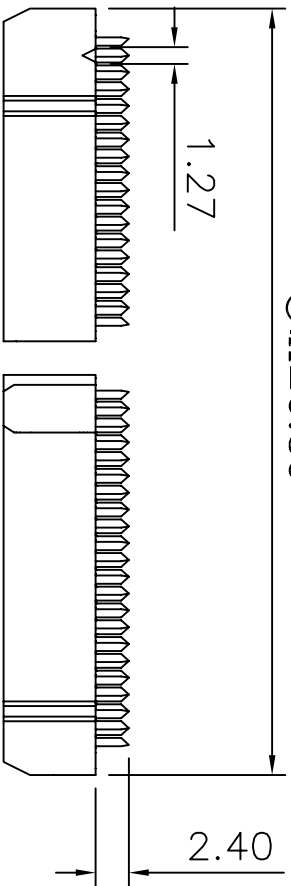

**MATERIALS:**  
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0  
 CONTACT MATERIAL:BRASS OR PHOSPHOR  
 BRONZE,GOLD FLASH OVER NICKEL  
**ELECTRICAL:**  
 CURRENT RATING:1AMP DC  
 INSULATION RESISTANCE:3000MΩ MIN.  
 CONTACT RESISTANCE:30mΩ MAX.  
 DIELECTRIC WITHSTANDING:500V AC  
 OPERATING TEMPERATURE:-40°C~+105°C  
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

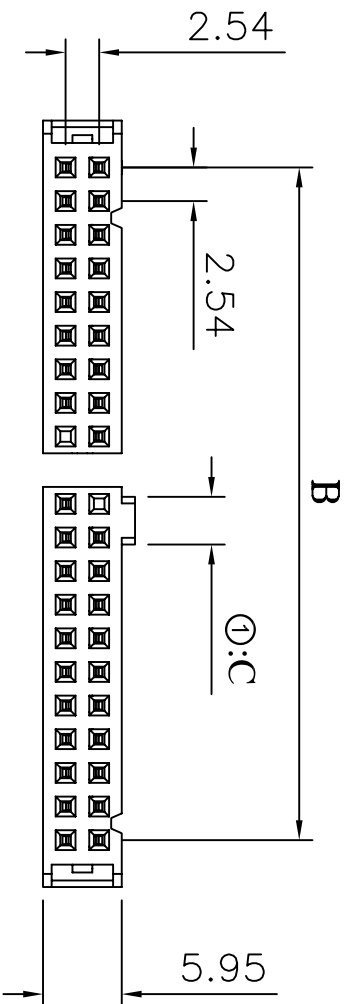

		DIMENSION					
CONTACT	A	B	C	CONTACT	A	B	C
06P	12.18	05.08	1.90	20P	29.96	22.86	3.60
08P	14.72	07.62	1.90	24P	35.04	27.94	3.60
10P	17.26	10.16	3.60	26P	37.58	30.48	3.60
12P	19.80	12.70	3.60	30P	42.66	35.56	3.60
14P	22.34	15.24	3.60	34P	47.74	40.64	3.60
16P	24.88	17.78	3.60	40P	55.36	48.26	3.60
18P	27.42	20.32	3.60	50P	68.06	60.96	3.60

(RoHS Compliant)

FC-11Y - XX B0 BK N 000 C

1 2 3 4 5 6

1. Circuits: 06 to 50pin

2. Material:

B0=Brass 4kg

B4=Brass 6kg

B6=Brass 6kg

P0=Phosphor Bronze 4kg

P4=Phosphor Bronze 4kg

3. Color: BK=Black

GR=Gray

4. Contact Plated:

T=Matte Tin over Nickel

W=Matte Tin over Nickel 150u"

Y=Bright Tin over Nickel

C=Gold Flash

P4=Phosphor Bronze 100u"

A=Gold 3u"

B=Gold 3u",Ni 50u"

D=Gold 5u"

E=Gold 5u",Ni 50u"

G=Gold 10u"

J=Gold 10u",Ni 50u"

L=Gold 15u"

M=Gold 15u",Ni 50u"

U=Gold 30u"

V=Gold 30u",Ni 50u"

N=Gold Flash, Ni

5. Special Options

6. Packing: C= Tray



CONN TOP  
 COMPONENT INC.

PART NO

FC-11Y-XXB0BK N000C

X

±0.3

.XX .XXX  
 ±0.20 ±0.100

1: FC-11-XXGRH0

DRAWING NO

FC-00022

EDITION: C3

ITEM: FC

2: FCT-B

DRAWN BY

GARY

2009/04/06

SCALE: 1:1

3: 0

APPROVAL BY

UNIT: m.m

Tel: (02)86481727 FAX: (02)86482427