


CONTACT	DIMENSION				
	A	B	C	D	E
10P	17.26	10.16	13.35	3.60	13.70
14P	22.34	15.24	13.35	3.60	18.78
16P	24.88	17.78	13.35	3.60	21.30
20P	29.96	22.86	13.35	3.60	26.38
24P	35.04	27.94	13.35	3.60	31.46
26P	37.58	30.48	13.35	3.60	34.00
34P	47.74	40.64	13.35	3.60	44.48
40P	55.36	48.26	13.35	3.60	52.10

MATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
 CONTACT MATERIAL:BRASS OR PHOSPHOR
 BRONZE,GOLD FLASH OVER NICKEL
ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:3000MQ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:500V AC
 OPERATING TEMPERATURE:-40°C--+105°C
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.

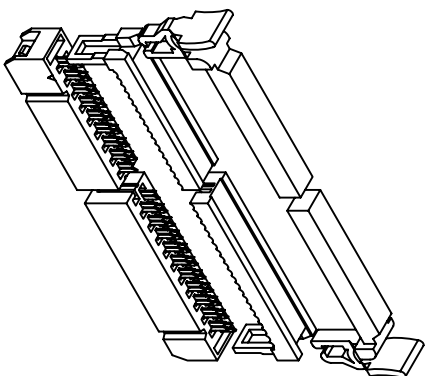

(RoHS Compliant)

FC-125 - XX B0 BK N 000 C
 1 2 3 4 5 6

1. Circuits: 06 to 50pin

2. Material:

B0=Brass 4kg

B4=Brass 4kg

B6=Brass 6kg

P0=Phosphor Bronze 4kg

P4=Phosphor Bronze 4kg

3. Color: BK=Black

GR=Grey

4. Contact Plated:

T=Matte Tin over Nickel

W=Matte Tin over Nickel 150u"

Y=Brighe Tin over Nickel

C=Gold Flash

F=Gold Flash,Matte Tin 100u"

A=Gold 3u",Ni 50u"

B=Gold 3u",Ni 50u"

D=Gold 5u"

E=Gold 5u",Ni 50u"

G=Gold 10u"

J=Gold 10u",Ni 50u"

L=Gold 15u"

M=Gold 15u",Ni 50u"

U=Gold 30u"

V=Gold 30u",Ni 50u"

N=Gold Flash , Ni

5. Special Options

6. Packing: C=Tray



CONN TOP
 COMPONENT INC.

PART NO

FC-125-XXB0BK N000C

.X
 ±0.3

.XXX
 ±0.20
 .XXX
 ±0.100

1:

FC-14-XXBRM0

DRAWING NO

FC-00103

EDITION: C

ITEM: FC

2:

FC-15-XXBRNSR

DRAWN BY

GARY

2008/09/30

SCALE: 1:1

3:

FC-12-XXGRH0

APPROVAL BY

UNIT: m.m

4:

FCT-B

TEL:(02)86481727

FAX:(02)86482427