



IMMATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
 CONTACT MATERIAL:BRASS OR PHOSPHOR
 BRONZE,GOLD FLASH OVER NICKEL
ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:5000MΩ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:1000V AC
 OPERATING TEMPERATURE:-40°C~+105°C
 TERMINATED WITH 1.27mm
 PITCH FLAT RIBBON CABLE.

| CONTACTS | A | B | CONTACTS | A | B |
|----------|-------|-------|----------|-------|-------|
| 06P | 12.94 | 5.08 | 26P | 38.40 | 30.48 |
| 08P | 15.48 | 07.62 | 28P | 40.60 | 33.02 |
| 10P | 18.10 | 10.16 | 30P | 43.50 | 35.56 |
| 12P | 20.51 | 12.70 | 34P | 48.58 | 40.64 |
| 14P | 23.05 | 15.24 | 40P | 56.20 | 48.26 |
| 16P | 25.64 | 17.78 | 50P | 69.00 | 60.96 |
| 18P | 28.15 | 20.32 | 60P | 81.75 | 73.66 |
| 20P | 30.78 | 22.86 | 64P | 86.83 | 78.74 |
| 24P | 35.86 | 27.94 | | | |

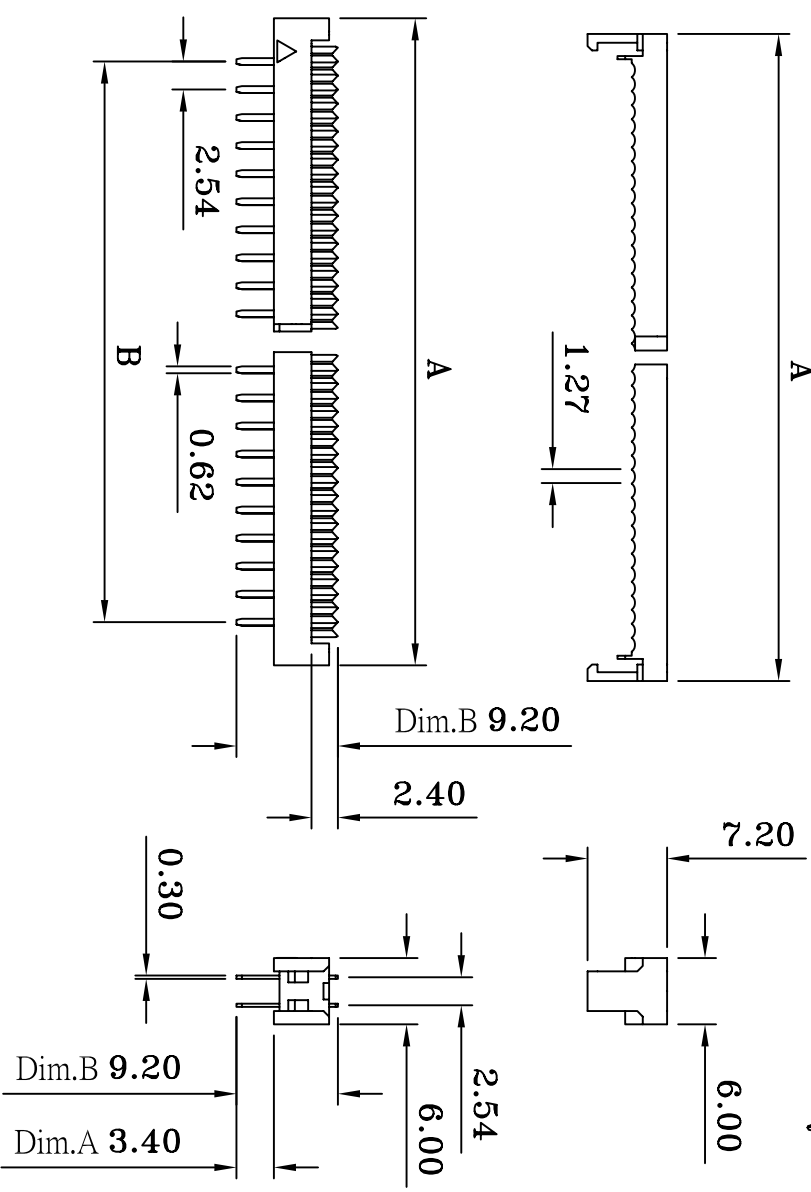

**Recommended P.C. Board
 Hole Layout**

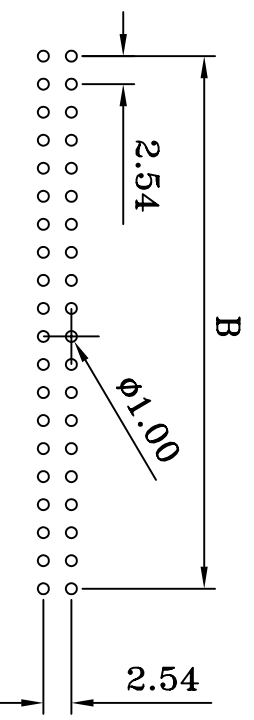

- (RoHS Compliant) FD-11 - XX B0 BK N 000 C
 1 2 3 4 5 6
- Circuit: 06 ~ 64pin
 - Material:
 B0=Brass
 P0=Phosphor Bronze
 - Color: BK=Black
 GR=Gray
 - Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Brighte Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Ni 50u"
 - Special Options
 D=Gold 5u"
 E=Gold 5u",Ni 50u"
 G=Gold 10u"
 J=Gold 10u",Ni 50u"
 L=Gold 15u"
 M=Gold 15u",Ni 50u"
 U=Gold 30u"
 V=Gold 30u",Ni 50u"
 N=Gold Flash , Ni
 - Packaging:
 C= Tray

| | | | |
|-----------------------------------|---------------|-------------------------|--------------------|
| ①:FD-11-XXB0BKKN000-2007/06/07-C | | CONN TOP COMPONENT INC. | |
| 1: | FD-11-XXBKKH0 | PART NO | FD-11-XXB0BKKN000C |
| 2: | FD-14-XXBKKM0 | DRAWING NO | FD-00017 |
| 3: | FDT-B | DRAWN BY | GARY |
| TEL:(02)86481727 FAX:(02)86482427 | | EDITION: | C1 |
| | | SCALE: | 1:1 |
| | | APPROVAL BY | |
| | | UNIT: | m.m |