



MATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER, UL94V-0
 CONTACT MATERIAL:BRASS OR PHOSPHOR
 BRONZE,GOLD FLASH OVER NICKEL
ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:5000MΩ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:1000V AC
 OPERATING TEMPERATURE:-40°C~+105°C
 TERMINATED WITH 1.27mm
PITCH FLAT RIBBON CABLE.

CONTACTS	A	B	CONTACTS	A	B
06P	12.94	5.08	26P	38.40	30.48
08P	15.48	07.62	28P	40.60	33.02
10P	18.10	10.16	30P	43.50	35.56
12P	20.51	12.70	34P	48.58	40.64
14P	23.05	15.24	40P	56.20	48.26
16P	25.64	17.78	50P	69.00	60.96
18P	28.15	20.32	60P	81.75	73.66
20P	30.78	22.86	64P	86.83	78.74
24P	35.86	27.94			

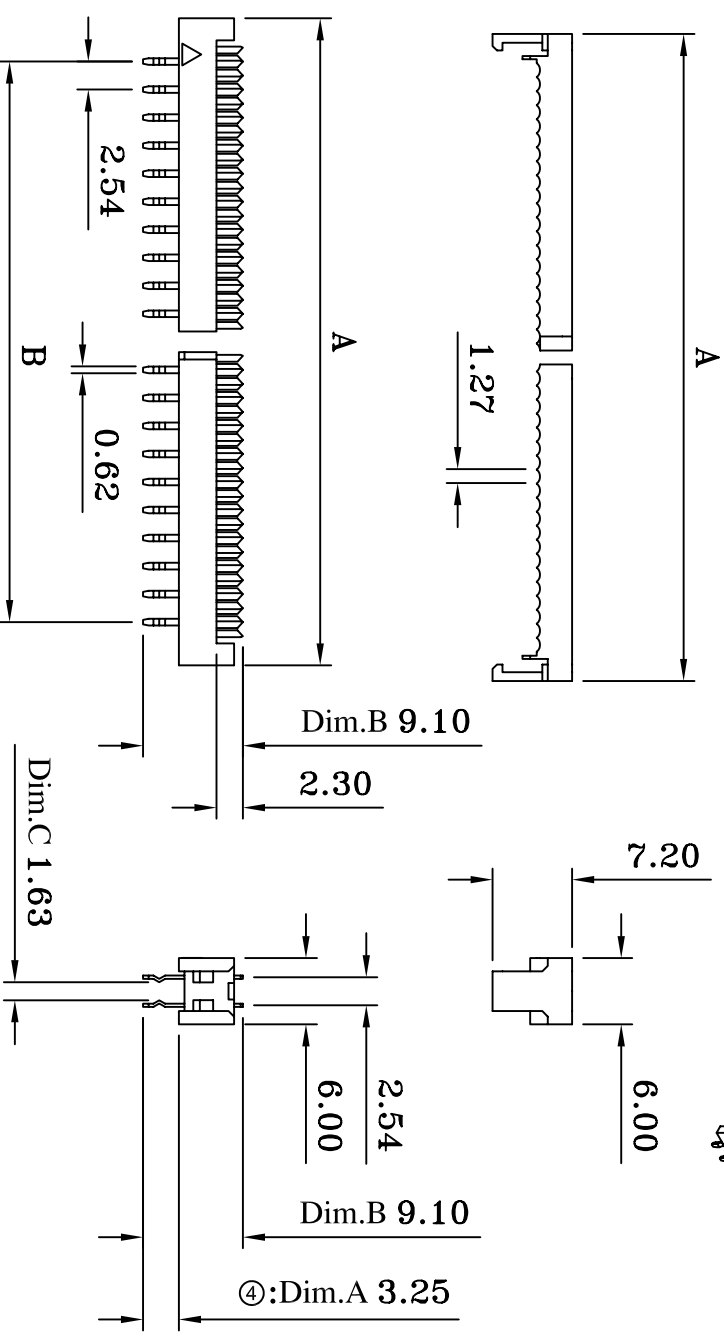

**Recommended P.C. Board
 Hole Layout**

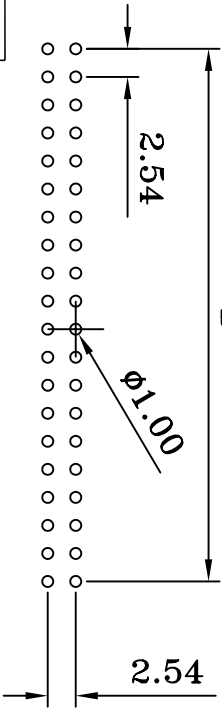

(RoHS Compliant) FD-11-XX K0 BK N 000 C

- Circuit: 06 ~ 64pin
- Material:
 - K0= Kink Brass
 - K1= Kink Phosphor Bronze
 - GR=Gray
- Color: BK=Black
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash,Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Ni 50u"
 - D=Gold 5u"
- Special Options
 - E=Gold 5u",Ni 50u"
 - G=Gold 10u"
 - J=Gold 10u",Ni 50u"
 - L=Gold 15u"
 - M=Gold 15u",Ni 50u"
 - U=Gold 30u"
 - V=Gold 30u",Ni 50u"
 - N=Gold Flash , Ni
 - C= Tray

①:3.40-2008/03/17-C1	CONN TOP COMPONENT INC.
②:FD-64P-2007/06/07-C	
③:FD-60P-2007/06/07-C	
④:FD-11-XXK0BKKN000-2007/06/07-C	
①: FD-11-XXBKHO	
②: FD-14-XXBKWO	
③: FDT-B	

PART NO	FD-11-XXK0BKKN000C	X	XX	XXX
DRAWING NO	FD-00031	±0.3	±0.20	±0.100
DRAWN BY	GARY	2009/06/17	SCALE: 1:1	ITEM: FD
APPROVAL BY				UNIT: m.m