


CONTACTS	A	B	CONTACTS	A	B
FD-6P	12.94	5.08	FD-26P	38.40	30.48
FD-8P	15.48	07.62	FD-28P	40.60	33.02
FD-10P	18.10	10.16	FD-30P	43.50	35.56
FD-12P	20.51	12.70	FD-34P	48.58	40.64
FD-14P	23.05	15.24	FD-40P	56.20	48.26
FD-16P	25.64	17.78	FD-50P	69.00	60.96
FD-18P	28.15	20.32	FD-60P	81.75	73.66
FD-20P	30.78	22.86	FD-64P	86.83	78.74
FD-24P	35.86	27.94			

Recommended P.C. Board
Hole Layout

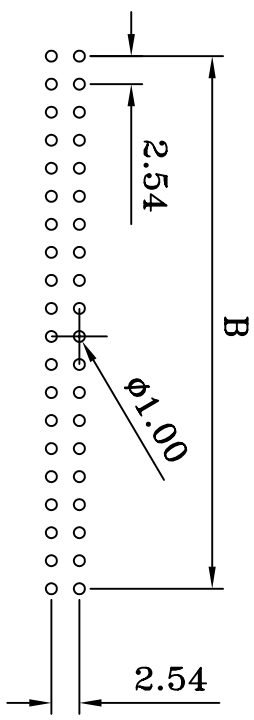

FD-12 - XX B0 GR N 000
1 2 3 4 5

- (RoHS Compliant)
- Circuits: 06 ~ 64pin
 - Material:
B0=Brass
P0=Phosphor Bronze
3. Color: BK=Black
GR=Gray
 - Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Brighte Tin over Nickel
C=Gold Flash
F=Gold Flash,Tin 100u"
A=Gold 3u",Ni 50u"
B=Gold 3u",Ni 50u"
D=Gold 5u"
 - Special Options:
E=Gold 5u",Ni 50u"
G=Gold 10u"
J=Gold 10u",Ni 50u"
L=Gold 15u"
M=Gold 15u",Ni 50u"
U=Gold 30u"
V=Gold 30u",Ni 50u"
N=Gold Flash, Ni

MATERIALS:
INSULATOR:P.B.T.30%GLASS FIBER, UL94V-0
CONTACT MATERIAL:BRASS OR PHOSPHOR
BRONZE,GOLD FLASH OVER NICKEL
ELECTRICAL:
CURRENT RATING:1AMP DC
INSULATION RESISTANCE:5000MQ MIN.
CONTACT RESISTANCE:30mΩ MAX.
DIELECTRIC WITHSTANDING:1000V AC
OPERATING TEMPERATURE:-40°C~+105°C
TERMINATED WITH 1.27mm
PITCH FLAT RIBBON CABLE.

		CONN TOP COMPONENT INC.	
1:	FD-11-XXXGRH0	PART NO	FD-12-XXB0GRN000
2:	FD-14-XXXGRM1	DRAWING NO	FD-00055
3:	FDT-B	DRAWN BY	GARY
TEL:(02)86481727 FAX:(02)86482427		APPROVAL BY	
X	±0.2	ITEM:	FD
X	±0.2	SCALE:	1:1
XX	±0.2	UNIT:	m.m