
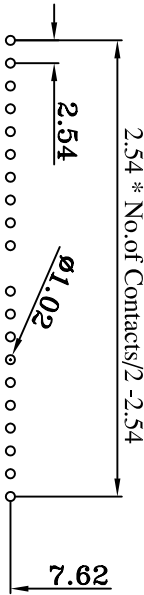


MATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
 CONTACT MATERIAL:BRASS OR PHOSPHOR
 BRONZE,GOLD FLASH OVER NICKEL
ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:5000MΩ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:1000V AC
 OPERATING TEMPERATURE:-40°C~+105°C
 TERMINATED WITH 1.27mm
 PITCH FLAT RIBBON CABLE.

CONTACTS	A	B
08P	15.45	07.62
10P	17.95	10.16
14P	23.05	15.24
16P	25.50	17.78
18P	28.12	20.32
20P	30.68	22.86
24P	35.80	27.94
28P	40.81	33.02
40P	56.15	48.26



(RoHS Compliant) FD-71-XX B0 BK N 000 C
 1 2 3 4 5 6

- Circuits: 08 to 40
- Tail Style:
 B0= Brass
 P0= Phosphor Bronze
 3. Color: BK=Black
 GR=Gray
- Contact Plated:
 T=Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Tin 100u"
 A=Gold 3u",Tin 100u"
 B=Gold 5u",Tin 100u"
 D=Gold 5u",Tin 100u"
 E=Gold 5u",Tin 100u"
- Special Options
 G=Gold 10u"
 J=Gold 10u",Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Tin 100u"
 N=Gold Flash, Ni
- Packing:
 C= Tray

CONN TOP COMPONENT INC.
 1: FD-71-XXBKHO
 2: FD-74-XXBKMO
 3: FDT-B
 TEL:(02)86481727 FAX:(02)86482427

PART NO	FD-71-XXB0BK N000C	.X	.XXX
DRAWING NO	FDM-00010	±0.3	±0.2X
DRAWN BY	LN	EDITION: C1	ITEM: FDM
APPROVAL BY		2009/02/05	SCALE: 1:1
			UNIT: m.m