
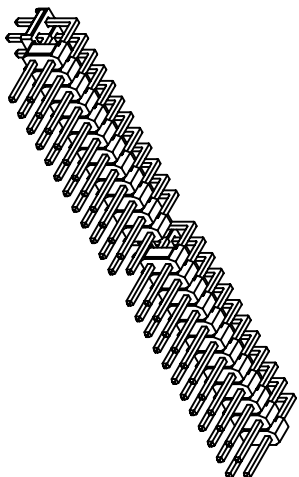
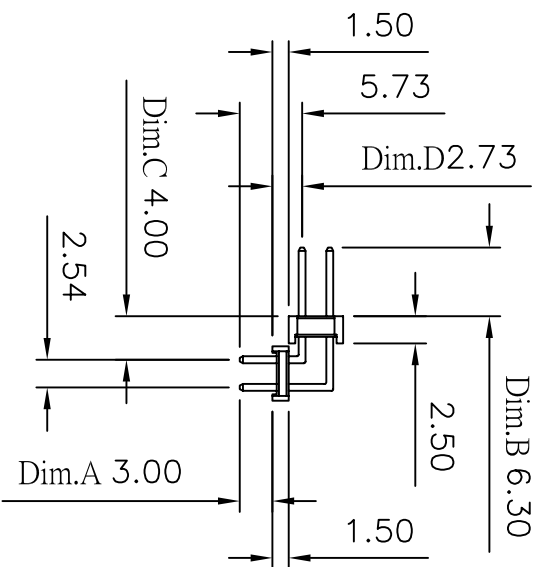
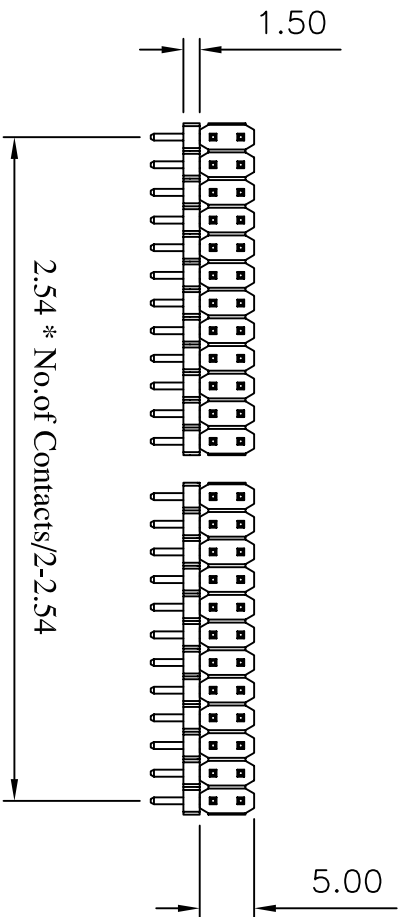



**2.54\*No.of Contacts/2 ±0.30**

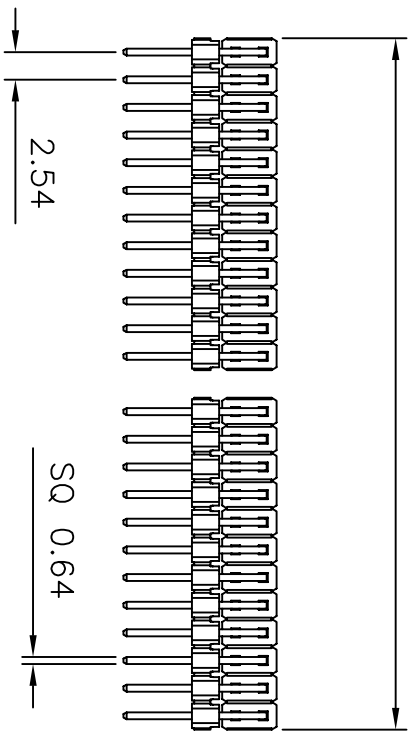

Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T

Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

Recommended P.C. Board  
 Hole Layout

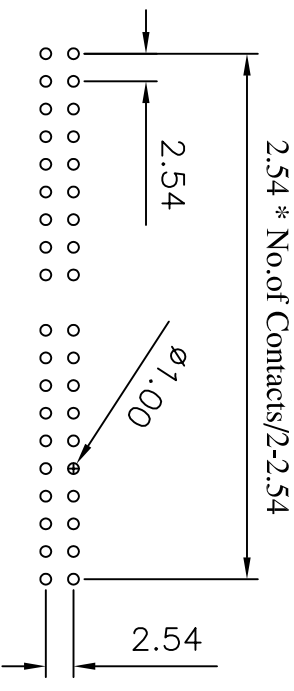

(RoHS Compliant)

H1 N 15 X - 2 XX R0 BK X D01 X  
 1 2 3 4 5 6 7 8

- Insulator Material:  
 N= Nylon-6T  
 P= Phosphor Bronze  
 Blank=Brass  
 3. Per Row 02~40 pin  
 4. Tail Style:  
 R0= Right Angle  
 5. Color: BK=Black  
 WH=White
- Contact Plated:  
 T=Matte Tin over Nickel  
 W=Matte Tin over Nickel 150u"  
 Y=Bright Tin over Nickel  
 C=Gold Flash  
 F=Gold Flash,Matte Tin 100u"  
 A=Gold 3u"  
 B=Gold 3u",Matte Tin 100u"
- Special Options  
 D=Gold 5u"  
 E=Gold 5u",Matte Tin 100u"  
 G=Gold 10u"  
 J=Gold 10u",Matte Tin 100u"  
 L=Gold 15u"  
 M=Gold 15u",Matte Tin 100u"  
 U=Gold 30u"  
 V=Gold 30u",Matte Tin 100u"
- Packaging:  
 A= PE Bag  
 D= Box



CONN TOP  
 COMPONENT INC.

1: H1N15-2XXXBKHD	DRAWING NO	PH-00465	EDITION: C	.X ±0.3	.XX ±0.20	.XXX ±0.100
2: H1N25-2XXXBKHD	DRAWN BY	GARY	2009/03/30			
3: QT-046X15.608N QT-046X20.608N	APPROVAL BY					UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427