



2.54 * No.of Contacts/2 ±0.30

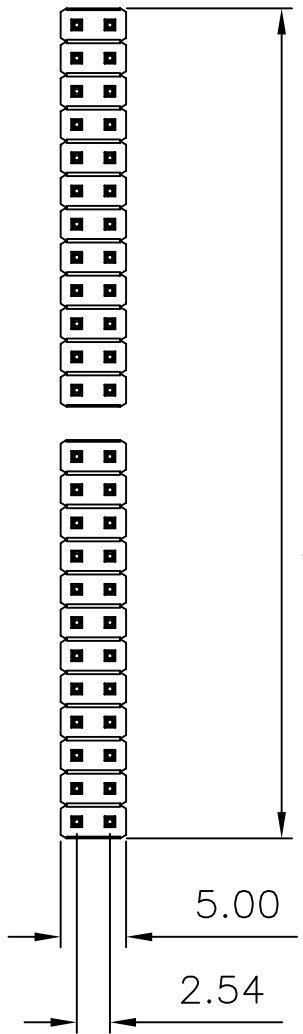

2.54 * No.of Contacts/2 -2.54

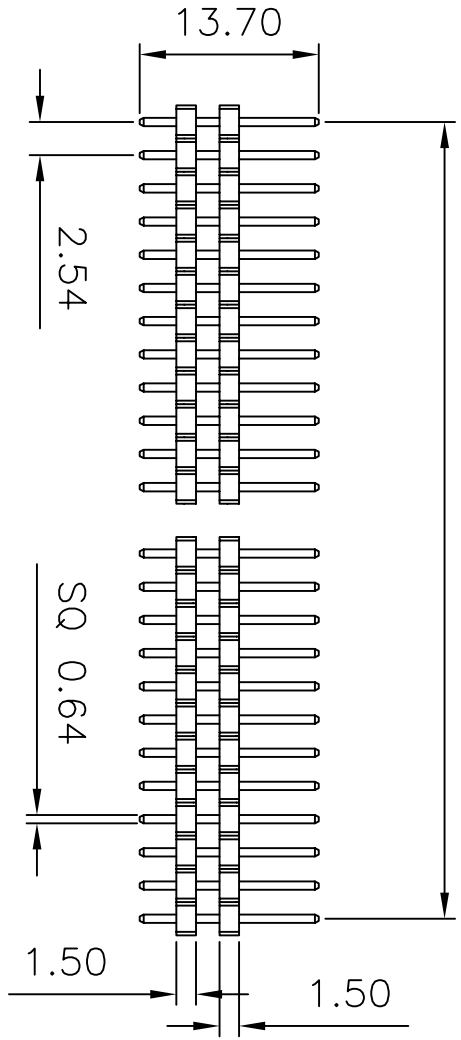


5.00
2.54

Dim.C 4.80


Dim.B 6.10

Dim.A 2.80

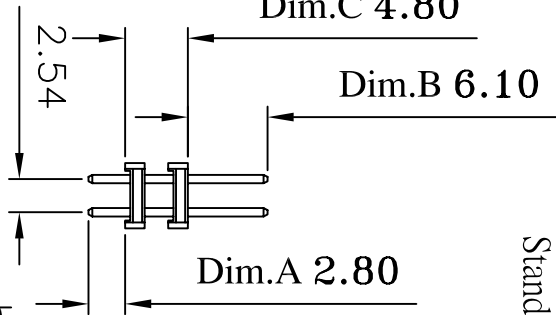

2.54 * No.of Contacts -2.54

Recommended P.C. Board
Hole Layout

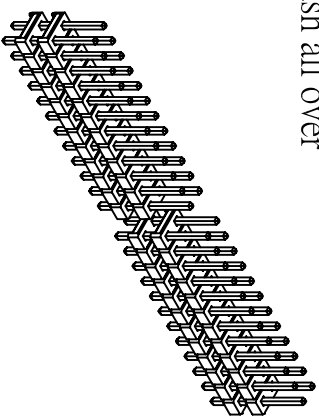

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

(RoHS Compliant)
 H1 N 15 X - 2 XX S0 BK X D01 X
 1 2 3 4 5 6 7 8

- Insulator Material:
 N= Nylon-6T
 P= Phosphor Bronze
 Blank=Brass
 3. Per Row: 02 to 40
 4. Tail Style:
 SO= Straight
 5. Color: BK=Black
 WH=White
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Matte Tin 100u"
- Special Options:
 D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
- Packing:
 A= PE Bag
 D= Box

①:HINI5-2XXXS0BKXD01A-2008/03/11-C



CONN TOP
 COMPONENT INC.

PART NO	HINI5X-2XXXS0BKXD01X	.X	.XX	.XXX
DRAWING NO	PH-00414	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PH	SCALE: 1:1
APPROVAL BY				UNIT: m.m

1:	HINI5-2XXXBKH0			
2:	QT-0.64X13.70BN			
3:	0			
TEL:(02)86481727 FAX:(02)86482427				

