


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

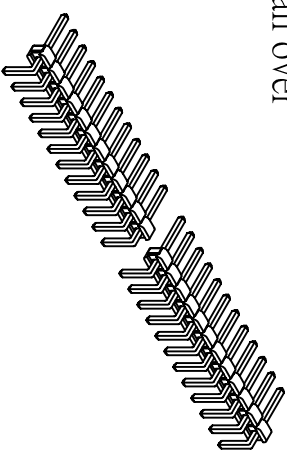

- (RoHS Compliant)
- | | |
|-------------------------------|--|
| 1. Insulator Material: | H1 N 15 X - 1 XX R0 BK X 000 X |
| N= Nylon-6T | 1 2 3 4 5 6 7 8 |
| 2. P= Phosphor Bronze | |
| Blank=Brass | |
| 3. Per Row: 02 to 40 | |
| 4. TOLL Style: | |
| RO= Right Angle | |
| 5. Color: BK=Black | |
| WH=White | |
| 6. Contact Plated: | D=Gold 5u"
E=Gold 5u",Matte Tin 100u"
G=Gold 10u"
J=Gold 10u",Matte Tin 100u"
L=Gold 15u"
M=Gold 15u",Matte Tin 100u"
U=Gold 30u"
V=Gold 30u",Matte Tin 100u" |
| T=Matte Tin over Nickel | |
| W=Matte Tin over Nickel 150u" | |
| Y=Bright Tin over Nickel | |
| C=Gold Flash | |
| F=Gold Flash,Matte Tin 100u" | |
| A=Gold 3u" | |
| B=Gold 3u",Matte Tin 100u" | |
| 7. Special Options | |
| 8. Packing: | A= PE Bag
D= Box |

		P1: H1N15-1XXXBKHX0 P2: QT-0.64X12.80BN P3: 0	
PART NO	H1N15X-1XXXR0BKX000X	.X	.XXX
DRAWING NO	PH-00122	±0.3	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PH
APPROVAL BY		2008/05/21	SCALE: 1:1
TEL: (02)86481727 FAX: (02)86482427		UNIT: m.m	