

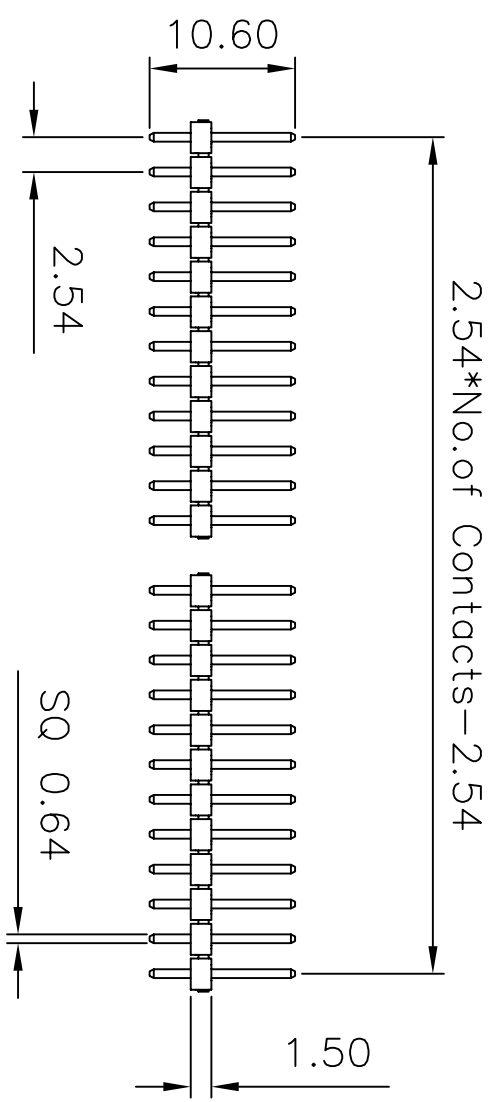
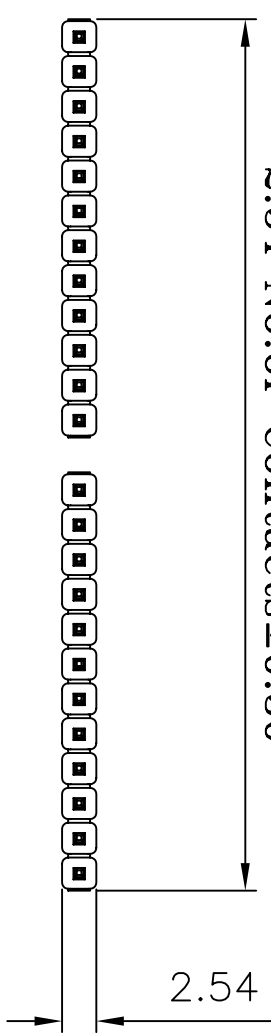


2.54*No.of Contacts±0.30

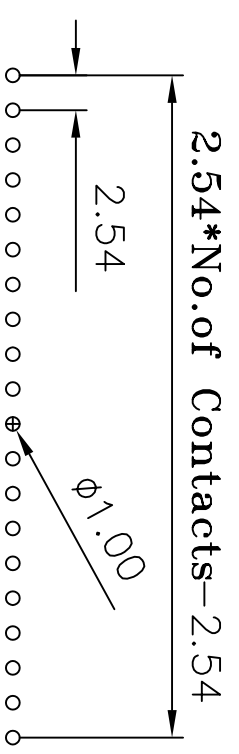

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

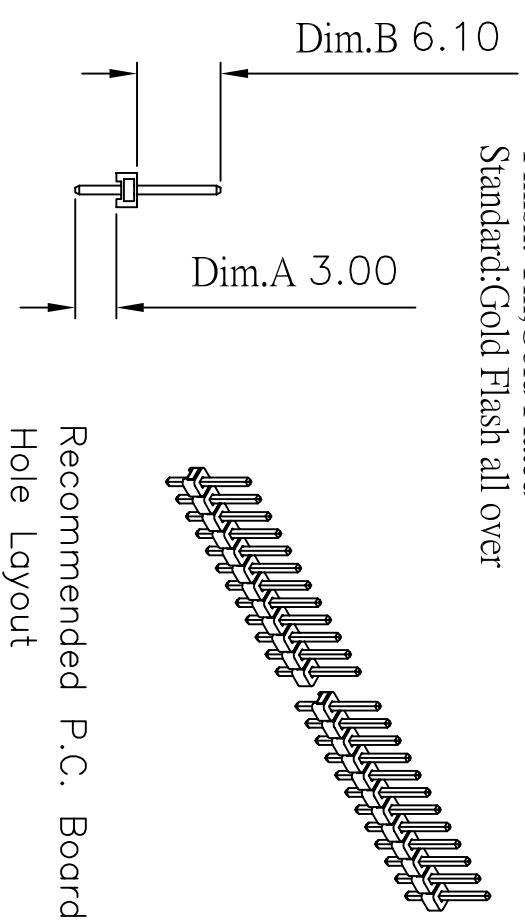

(RoHS Compliant) H1 N 15 X - 1 XX S0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material:
 N= Nylon-6T
 P= Phosphor Bronze
 Blank=Brass
 3. Per Row: 02 to 40
 4. Tail Style:
 SO= Straight
 5. Color: BK=Black
 WH=White
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Matte Tin 100u"
- Special Options
 D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
- Packing:
 A= PE Bag
 D= Box

◎HINI5-1XXXS0BKX000-2007/01/24-C
 CONN TOP COMPONENT INC.

1:	HINI5-1XXXBKH0	DRAWING NO	PH-00123	EDITION:	C1	ITEM:	PH
2:	QT-0.64X10.60BN	DRAWN BY	GARY	2008/05/21	SCALE:	1:1	
3:	0	APPROVAL BY					UNIT: m.m

TEL:(02)86481727 FAX:(02)86482427