



Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T

Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

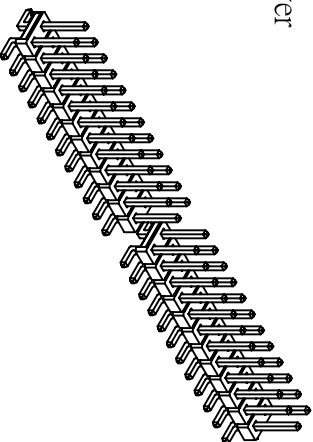

Recommended P.C. Board  
 SMD Layout

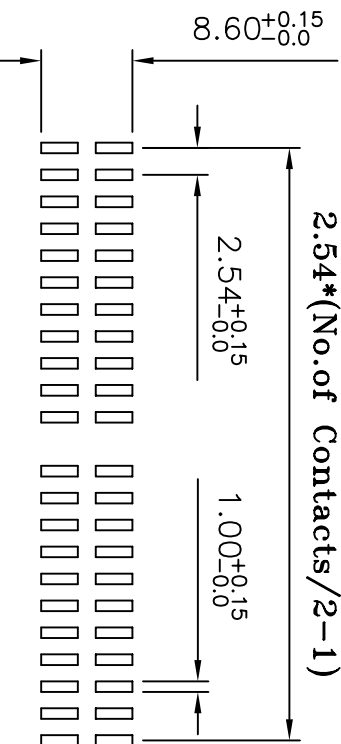

(RoHS Compliant)

H1 N 15 X - 2 XX D0 BK X 000 X  
 1 2 3 4 5 6 7 8

- Insulator Material:  
N= Nylon-6T
- Phosphor Bronze  
Blank=Bronze
- Per Row: 02 to 40  
Do= S.M.D Type
- Color: BK=Black  
WH=White
- Contact Plated:  
T=Matte Tin over Nickel  
W=Matte Tin over Nickel  
Y=Bright Tin over Nickel
- Special Options:  
D=Gold 5u"  
E=Gold 5u",Matte Tin 100u"  
G=Gold 10u"  
J=Gold 10u",Matte Tin 100u"  
L=Gold 15u"  
M=Gold 15u",Matte Tin 100u"  
U=Gold 30u"  
V=Gold 30u",Matte Tin 100u"
- Packing:  
B= Tube  
D= Box



CONN TOP  
 COMPONENT INC.

©:H1N15-1-XXD0BKX000-2007/01/24-C

1:	H1N15-2-XXBK0
2:	QT-0.64X 11.00BN
3:	0

PART NO	H1N15X-2XXD0BKX000X	.X	.XX	.XXX
DRAWING NO	PH-00124	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PH	SCALE: 1:1
APPROVAL BY			UNIT: m.m	