


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

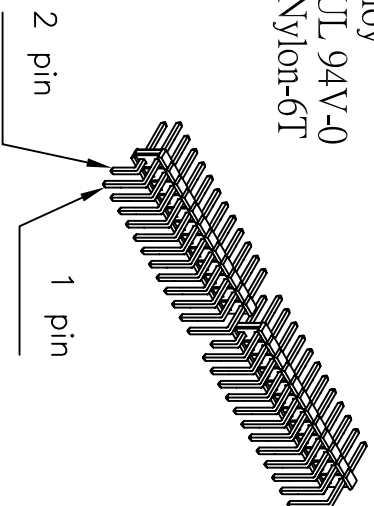

Recommended P.C. Board
 Hole Layout

(RoHS Compliant) H1 N 15 X - 2 XX R0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N = Nylon-6T
P = Phosphor Bronze
Blank=Brass
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over Nickel 150u"
Y=Bright Tin over Nickel
- Per Row: 02 to 40
Toill Style:
R0 = Right Angle
Color: BK=Black
WH=White
- Contact Plated:
D=Gold 5u"
E=Gold 5u" Matte Tin 100u"
G=Gold 10u"
J=Gold 10u" Matte Tin 100u"
- Per Row: 02 to 40
Toill Style:
L=Gold 15u"
M=Gold 15u" Matte Tin 100u"
U=Gold 30u"
V=Gold 30u" Matte Tin 100u"
- Special Options
A = PE Bag
D = Box
- Packng:



CONN TOP
 COMPONENT INC.

©:HN15-2XXR0BKX000-2007/01/24-C

1:	HN15-2XXBKHO	PART NO	HN15X-2XXR0BKX000X	.X	±0.3
2:	QT-0.64X XXBN	DRAWING NO	PH-00125	.XX	±0.20
3:	0	DRAWN BY	GARY	.XXX	±0.100
TEL: (02)86481727 FAX: (02)86482427			EDITION: C1	ITEM: PH	SCALE: 1:1
			APPROVAL BY	UNIT: m.m	