

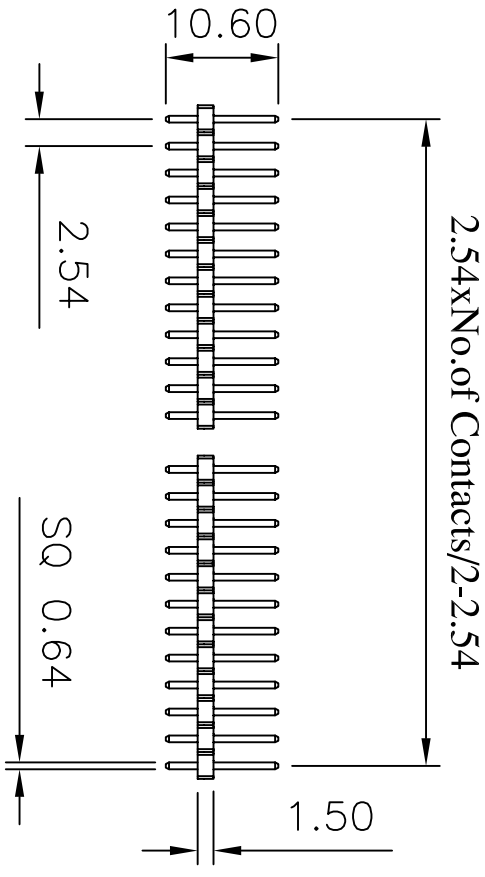



2.54xNo.of Contacts/2 ±0.30

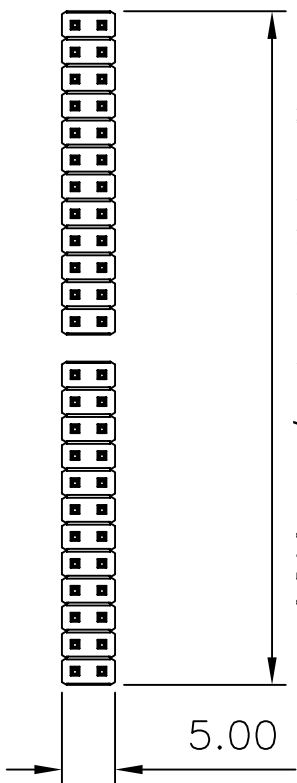

Dim.B 6.10

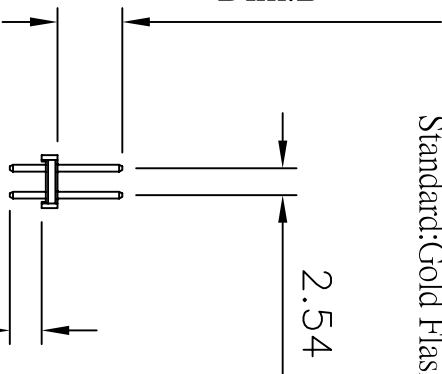


Dim.A 3.00

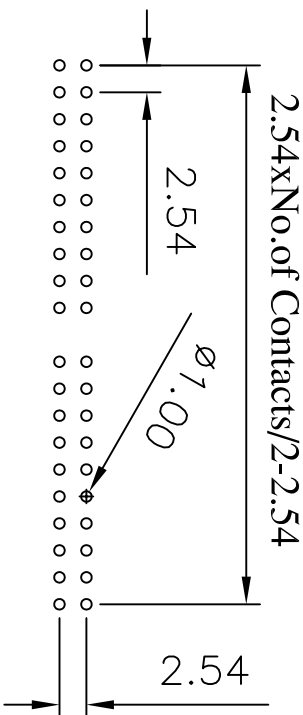

Recommended P.C. Board Hole Layout

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: 1000 V AC
- Operating Temperature: -40° ~ +105° C
- Max Processing Temp: 230° C for 60 seconds
- Max Processing Temp: 260° C for 10 seconds
- Contact Material: Copper Alloy
- Insulator Material: Polyester, UL 94V-0
- Standard: Nylon-6T

Finish: Tin, Gold Plated
Standard: Gold Flash all over

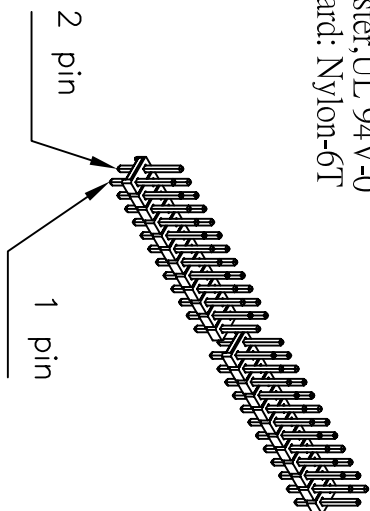

- Insulator Material: N= Nylon-6T, P= Phosphor Bronze, Blank=Bross
- Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over Nickel 150u", Y=Bright Tin over Nickel, C=Gold Flash, F=Gold Flash, Matte Tin 100u", A=Gold 3u", B=Gold 3u", Matte Tin 100u"
- Per Row: 02 to 40
- Taill Style: S0= Straight, 5. Color: BK=Black, WH=White
- Contact Plated: D=Gold 5u", E=Gold 5u", Matte Tin 100u", G=Gold 10u", H=Gold 10u", Matte Tin 100u", J=Gold 10u", Matte Tin 100u", L=Gold 15u", M=Gold 15u", Matte Tin 100u", U=Gold 30u", V=Gold 30u", Matte Tin 100u"
- Special Options: 8. Packing: A= PE Bag, D= Box

(RoHS Compliant)

H1	N	15	X	-	2	XX	S0	BK	X	000	X
1		2			3	4	5	6	7	8	



PART NO		H1N15X-2XXXS0BKX000X		.X	.XX	.XXX
DRAWING NO		PH-00126		±0.3	±0.20	±0.100
DRAWN BY		GARY		EDITION: C1	ITEM: PH	SCALE: 1:1
APPROVAL BY				2008/05/23	SCALE: 1:1	UNIT: m.m

①:H1N15-2XXXS0BKX000-2007/01/24-C
CONN TOP COMPONENT INC.
H1N15-2XXXBKX0
QT-0.64X10.60BN
0
TEL:(02)86481727 FAX:(02)86482427