

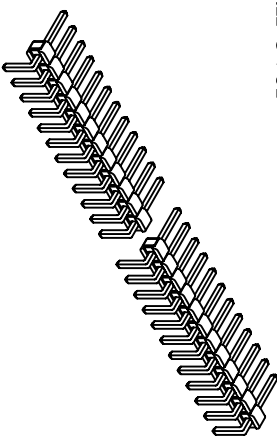


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

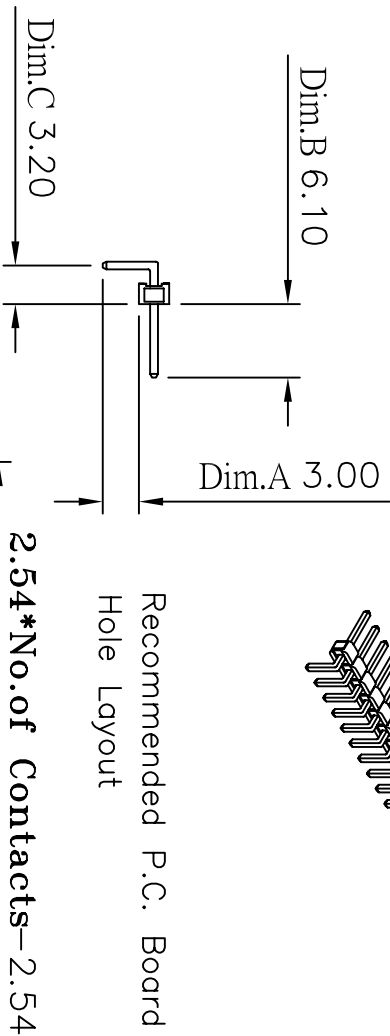

Recommended P.C. Board Hole Layout

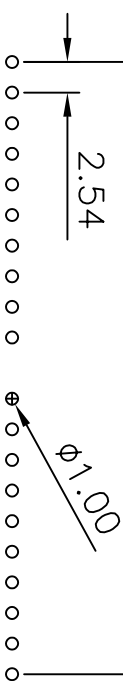

(RoHS Compliant) H1 N 17 X - 1 XX R0 BK X 000 X
1 2 3 4 5 6 7 8

- Insulator Material: N= Nylon-6T
- Phosphor Bronze Blank=Bronze
- Per Row: 02 to 40
- Toll Style: R0= Right Angle
- Color: BK=Black WH=White
- Contact Plated: T=Matte Tin over Nickel
- Contact Plated: W=Matte Tin over Nickel
- Contact Plated: Y=Bright Tin over Nickel
- Contact Plated: C=Gold Flash
- Contact Plated: F=Gold Flash, Matte Tin 100u"
- Contact Plated: A=Gold 3u"
- Contact Plated: B=Gold 3u", Matte Tin 100u"
- Special Options: D=Gold 5u"
- Special Options: E=Gold 5u", Matte Tin 100u"
- Special Options: G=Gold 10u"
- Special Options: J=Gold 10u", Matte Tin 100u"
- Special Options: L=Gold 15u"
- Special Options: M=Gold 15u", Matte Tin 100u"
- Special Options: U=Gold 30u"
- Special Options: V=Gold 30u", Matte Tin 100u"
- Packings: A= PE Bag
- Packings: D= Box



CONN TOP COMPONENT INC.

PART NO HINI7X-1XXXR0BKX000X

X .XX .XXX
±0.3 ±0.20 ±0.100

1: HINI7-1XXXRBKH0
2: QT-0.64X13.00BN
3: 0

DRAWING NO PH-00128
DRAWN BY GARY
EDITION: C1
SCALE: 1:1

TEL: (02)86481727 FAX: (02)86482427

APPROVAL BY

UNIT: m.m