
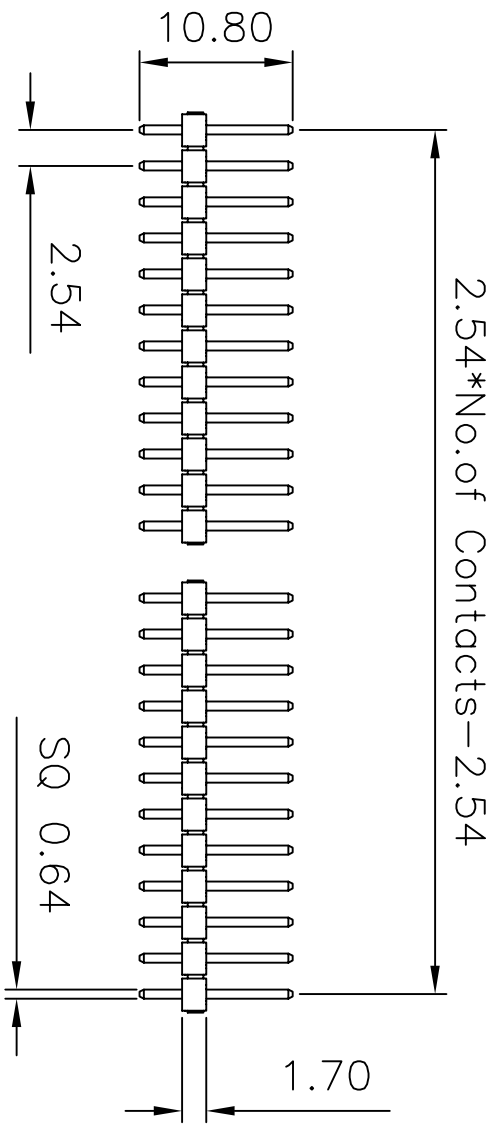


2.54*No.of Contacts±0.30

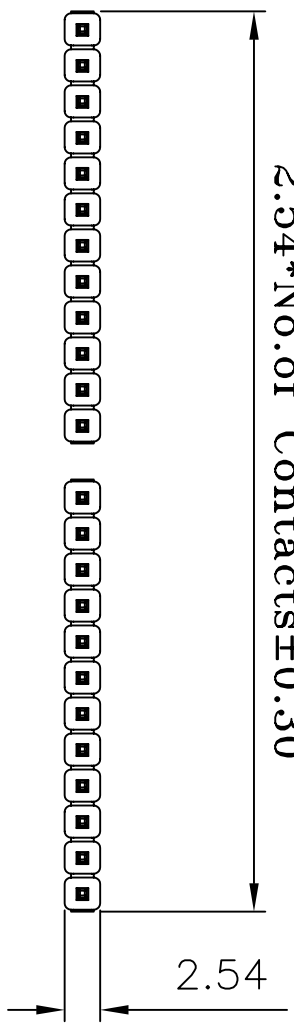

Current Rating:

3 Amps

Insulator Resistance:

5000 Megohms min

Contact Resistance:

20 m ohms max

Dielectric Withstanding:

1000 V AC

Operating Temperature:

-40° ~ +105° C

Max Processing Temp:

230° C for 60 seconds

Max Processing Temp:

260° C for 10 seconds

Contact Material:

Copper Alloy

Insulator Material:


Polyester, UL 94V-0

Finish: Tin, Gold Plated
Standard: Gold Flash all over

Standard: Nylon-6T

Dim.B 6.10

Dim.A 3.00

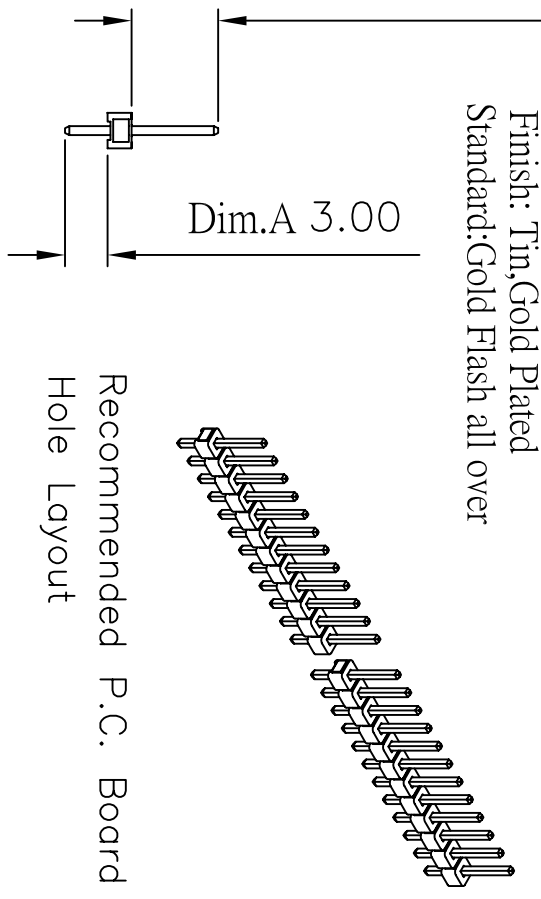

Recommended P.C. Board
Hole Layout

(RoHS Compliant)

H1	N	17	X	-	1	XX	S0	BK	X	000	X
1		2			3	4	5	6	7	8	

- Insulator Material:
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Blank=Brass
 - 3. Per Row: 02 to 40
 - 4. Tjall Style:
 - S0= Straight
 - Color: BK=Black
 - WH=White
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Blank=Brass
 - 3. Per Row: 02 to 40
 - 4. Tjall Style:
 - S0= Straight
 - Color: BK=Black
 - WH=White
- Special Options:
 - D=Gold 5u"
 - E=Gold 5u",Matte Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u",Matte Tin 100u"
 - L=Gold 15u"
 - M=Gold 15u",Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u",Matte Tin 100u"
- Packings:
 - A= PE Bag
 - D= Box



CONN TOP
COMPONENT INC.

PART NO

H1N17X-1XXXS0BKX000X

.X ±0.3

.XX ±0.20

.XXX ±0.100

1:	H1N17-1XXXBKH0
2:	QT-0.64X10.80BN
3:	0

DRAWING NO

PH-00129

EDITION: C1

SCALE: 1:1

UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427

APPROVAL BY

GARY

2008/05/27

UNIT: m.m