



Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

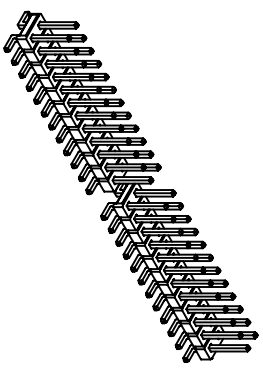

Recommended P.C. Board
 SMD Layout

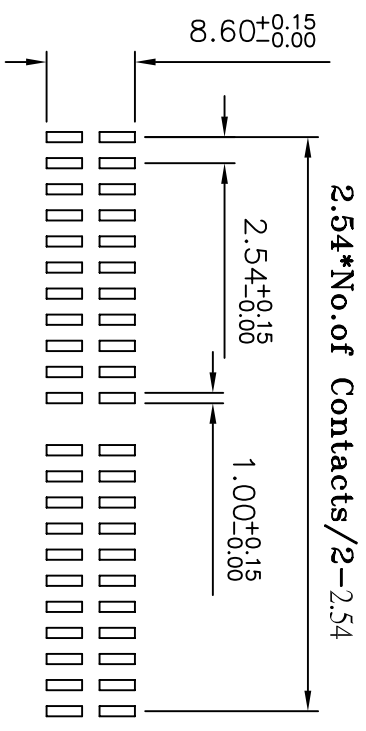

(RoHS Compliant)

- Insulator Material: 6. Contact Plated:
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Blank=Brass
 - Per Row: 02 to 40
 - Tall Style:
 - DO= S.M.D Type
 - Color: BK=Black
 - WH=White
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Matte Tin 100u"
 - D=Gold 5u"
 - E=Gold 5u",Matte Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u",Matte Tin 100u"
 - L=Gold 15u"
 - M=Gold 15u",Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u",Matte Tin 100u"
- Special Options
 - 8. Packing:
 - B= Tube
 - D= Box

H1 N 17 X - 2 XX D0 BK X 000 X
 1 2 3 4 5 6 7 8

©:H1N17-2XXXD0BKX000-2007/01/24-C			
		PART NO H1N17X-2XXXD0BKX000X	
1:	H1N17-2XXXBKHO	DRAWING NO	PH-00130
2:	QT-0.64X11.30BN	DRAWN BY	GARY
3:	0	APPROVAL BY	
TEL: (02)86481727 FAX: (02)86482427		EDITION: C1	2008/05/27
		SCALE: 1:1	
		UNIT: m.m	
		.X	.XX
		±0.3	±0.20
		PH	PH