



Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 1000 V AC
Operating Temperature: -40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
Standard: Nylon-6T

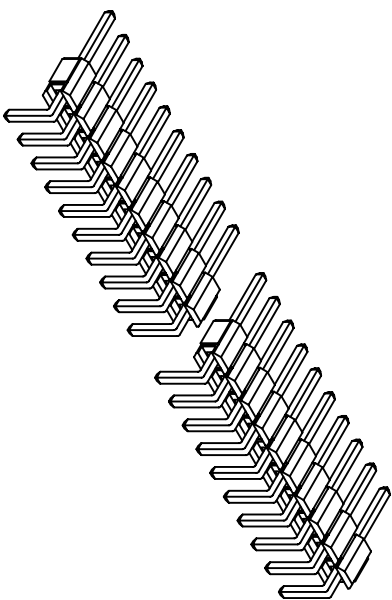

Recommended P.C. Board
 Hole Layout

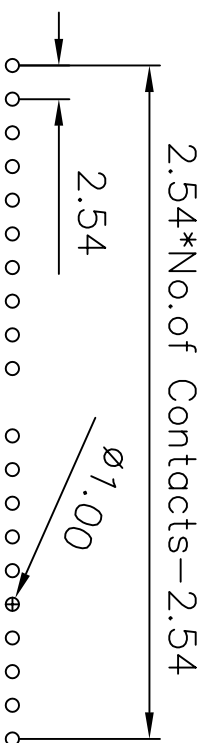

(RoHS Compliant) H1 N 35 X - 1 XX R0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material: Nylon-6T
- Phosphor Bronze Blank=Brass
- Per Row: 02 to 40
- Taill Style: RO= Right Angle
- Color: BK=Black WH=White
- Contact Plated: T=Matte Tin over Nickel
- Special Options

CONN TOP COMPONENT INC.		PART NO		H1N35X-1XXR0BKX000X		.X		.XXX	
1: H1N35-1XXBKHO		DRAWING NO		PH-00490		EDITION: C		ITEM: PH	
2: QT-0.64X14.80BN		DRAWN BY		GARY		2009/08/26		SCALE: 1:1	
3: 0		APPROVAL BY						UNIT: m.m	
TEL: (02)86481727 FAX: (02)86482427									