

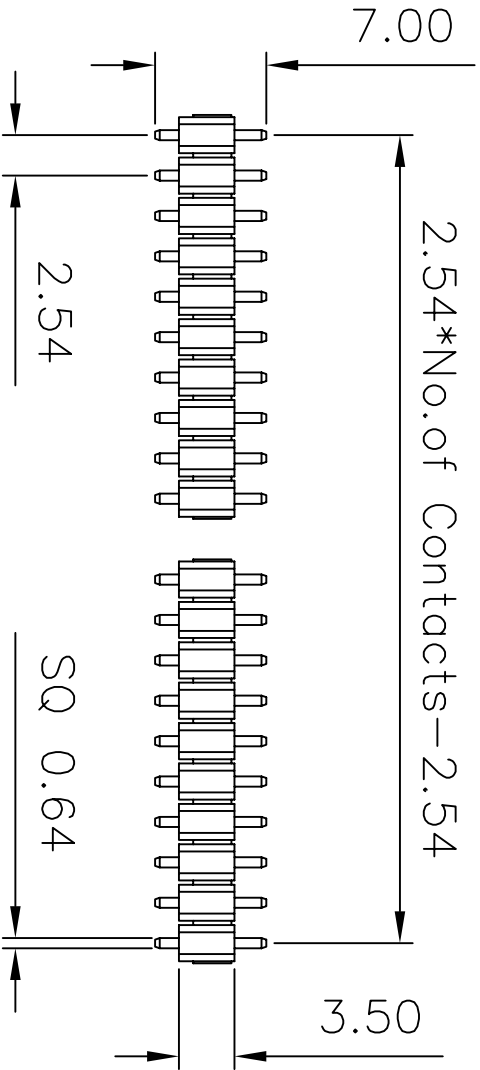
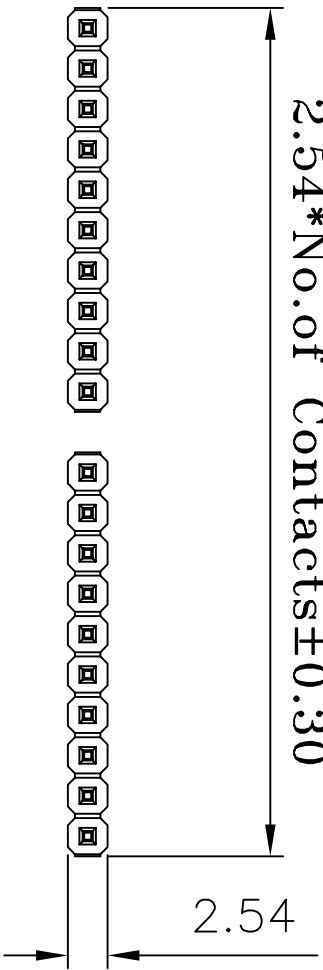


**2.54\*No.of Contacts±0.30**

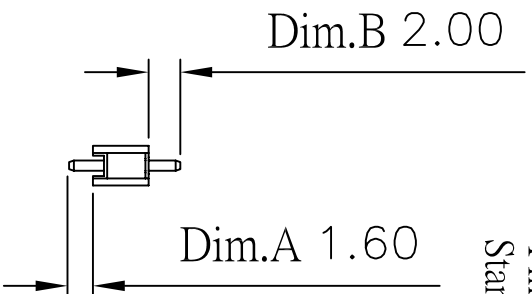


Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: Nylon-6T

Finish: Tin, Gold Plated  
 Standard: Gold Flash all over

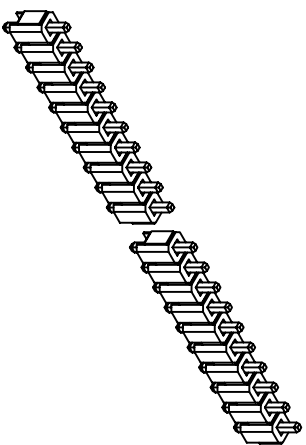

Recommended P.C. Board  
 Hole Layout

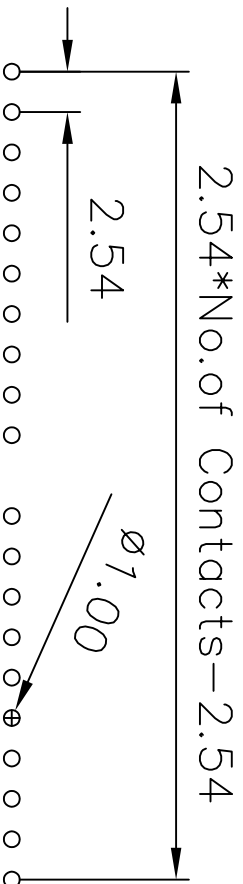

(RoHS Compliant) H1 N 35 X - 1 XX S0 BK X 000 X  
 1 2 3 4 5 6 7 8

- Insulator Material:  
 N= Nylon-6T  
 P= Phosphor Bronze  
 Blank=Brass
- Contact Plated:  
 T=Matte Tin over Nickel  
 W=Matte Tin over Nickel 150u"  
 Y=Bright Tin over Nickel
- Per Row: 02 to 40  
 Tail Style:  
 SO= Straight  
 Color: BK=Black  
 WH=White
- Contact Plated:  
 D=Gold 5u"  
 E=Gold 5u",Matte Tin 100u"  
 G=Gold 10u"  
 J=Gold 10u",Matte Tin 100u"
- Packing:  
 A= PE Bag  
 D= Box
- Special Options:  
 L=Gold 15u"  
 M=Gold 15u",Matte Tin 100u"  
 U=Gold 30u"  
 V=Gold 30u",Matte Tin 100u"



CONN TOP  
 COMPONENT INC.

PART NO

H1N35X-1XXXS0BKX000X

.X .XX .XXX  
 ±0.3 ±0.20 ±0.100

1: H1N35-1XXXBKHO  
 2: QT-0.64X7.00BN  
 3: 0

DRAWING NO

PH-00223

EDITION: C1

ITEM: PH

BOM

DRAWN BY

GARY

SCALE: 1:1

TEL:(02)86481727 FAX:(02)86482427

APPROVAL BY

UNIT: m.m