
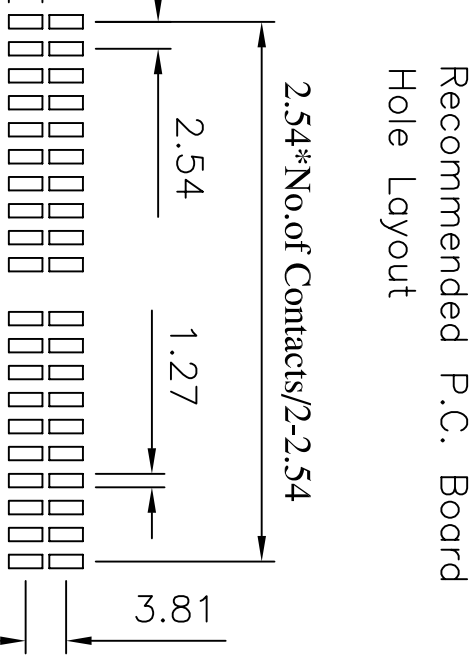


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

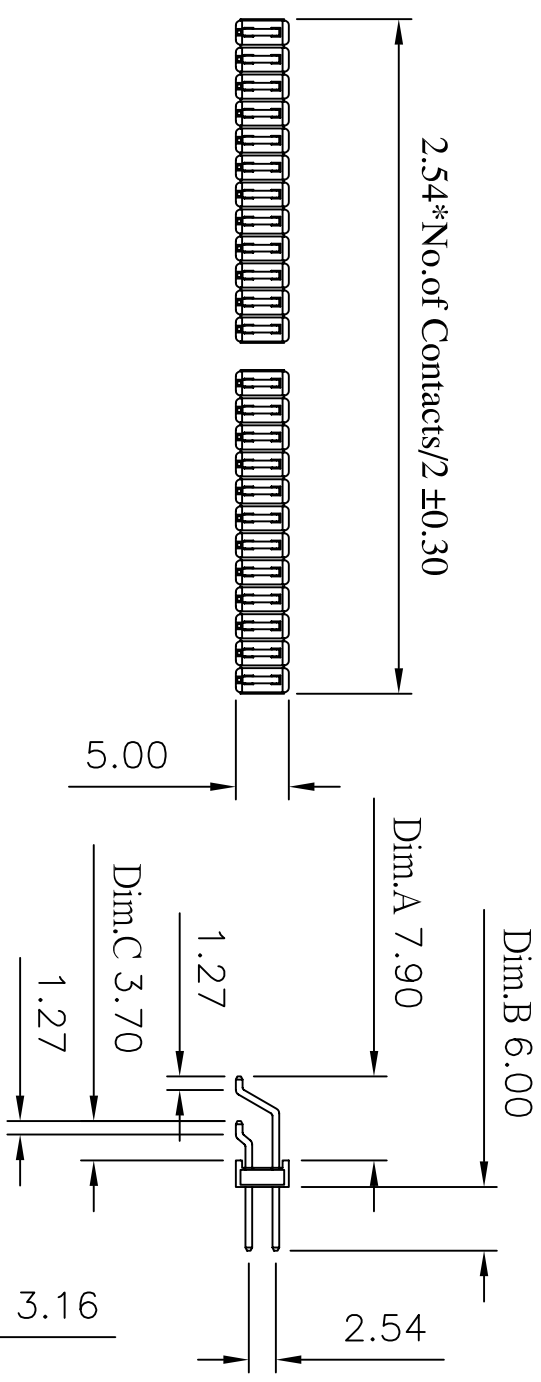

(RoHS Compliant)

H1 X 25 X - 2 XX SD BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material:
 A= P.B.T
 N= Nylon-6T
 P= Phosphor Bronze
 Blank=Brass
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Matte Tin 100u"
- Per Row 02~40 pin
- Tail Style:
 SD= R/A SMD
- Color: BK=Black

- Special Options
 D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
- Packings:
 B = Tube
 D = Box

①:H1N25-2XXXSDBKX000-2007/01/23-C

1:	H1N25-2XXXBKHO
2:	QT-0.64X12.50BN
3:	QT-0.64X18.00BN

CONN TOP COMPONENT INC.		PART NO	H1N25X-2XXXSDBKX000X	X	.XX	.XXX
DRAWING NO	PH-00137	EDITION:	C1	±0.3	±0.20	±0.100
DRAWN BY	GARY	SCALE:	2008/04/02			
APPROVAL BY		ITEM:	PH			
TEL: (02)86481727	FAX: (02)86482427	UNIT:	m.m			