

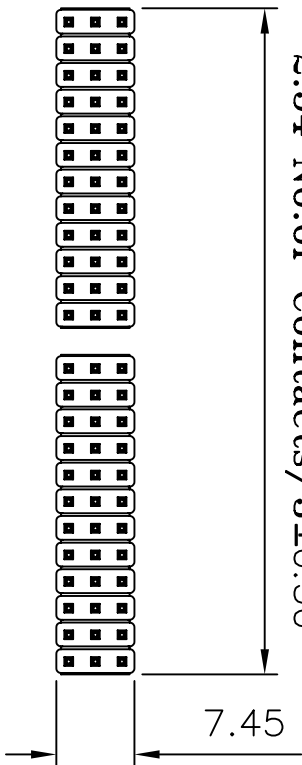
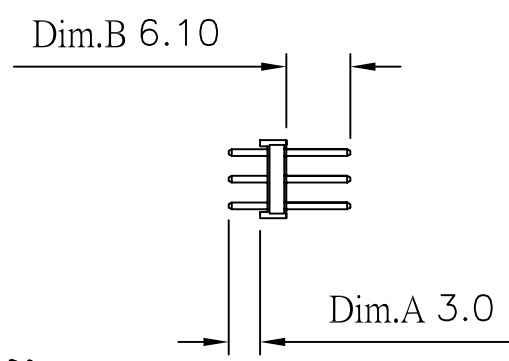


2.54\*No.of Contacts/3±0.30

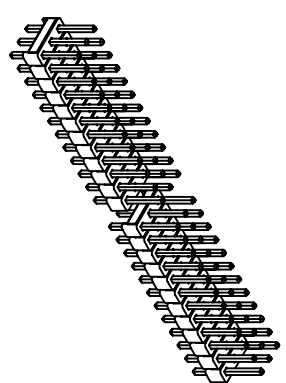

2.54\*No.of Contacts/3-2.54

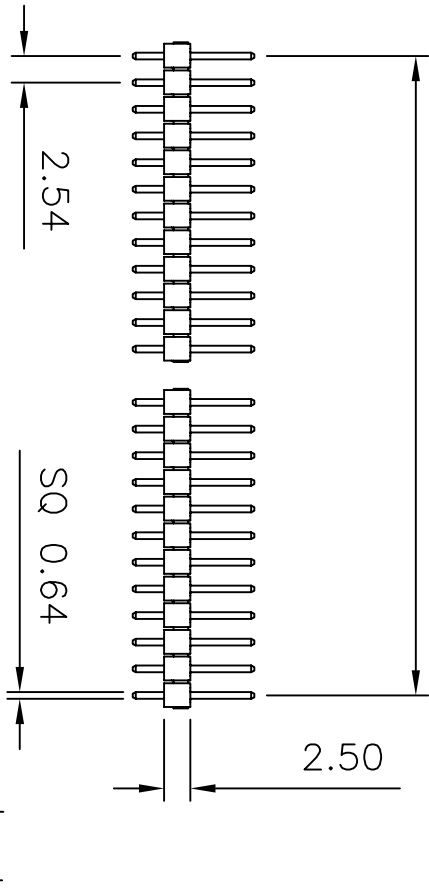


Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: -40° ~ +105° C  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0 Standard: PBT  
 Finish: Gold Plated or Duplex Plated  
 Standard: Gold Flash all over  
 Note: Duplex Plating: Gold Plated on contact area, Tin on solder area

Insulator Material: Polyester, UL 94V-0 Standard: Nylon-6T  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds

Recommended P.C. Board Hole Layout

2.54\*No.of Contacts/3-2.54

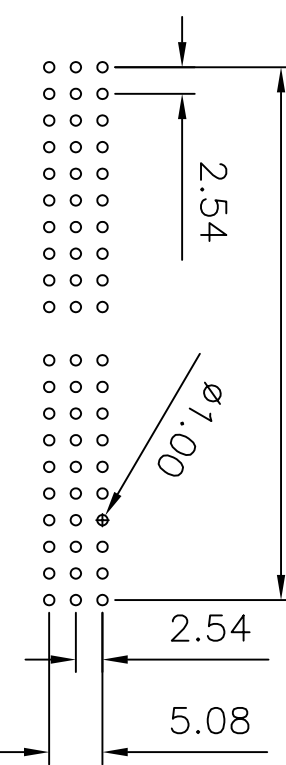

(RoHS Compliant)

- Insulator Material: A= P.B.T, N= Nylon-6T, P= Phosphor Bronze, Blank=Brass, Per Row 02~40 pin, SO= Straight, Color: BK=Black, WH=White
- Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over Nickel 150u", Y=Bright Tin over Nickel, C=Gold Flash, F=Gold Flash, Matte Tin 100u", A=Gold 3u", B=Gold 3u", Matte Tin 100u"
- Special Options: D=Gold 5u", E=Gold 5u", Matte Tin 100u", G=Gold 10u", J=Gold 10u", Matte Tin 100u", L=Gold 15u", M=Gold 15u", Matte Tin 100u", U=Gold 30u", V=Gold 30u", Matte Tin 100u"
- Packing: A= PE Bag, D= Box

©:HX25-3XXXS0BKX000-2007/01/19-C

CONN TOP COMPONENT INC.	
1:	H1X25-3XXXBK1H0
2:	QT-0.64X11.60BN
3:	0

PART NO	H1X25X-3XXXS0BKX000X	.X	.XX	.XXX
DRAWING NO	PH-00016	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PH	SCALE: 1:1
APPROVAL BY				UNIT: m.m

