
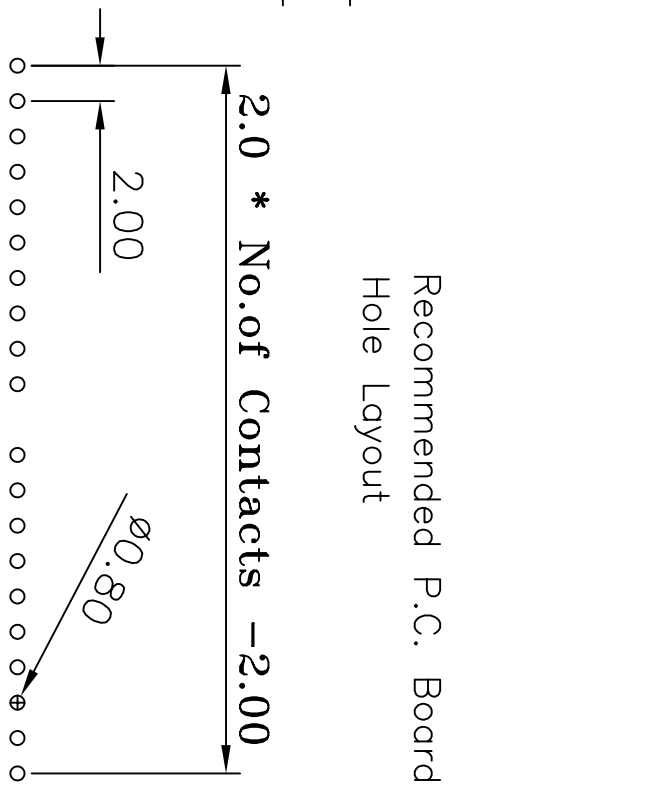


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

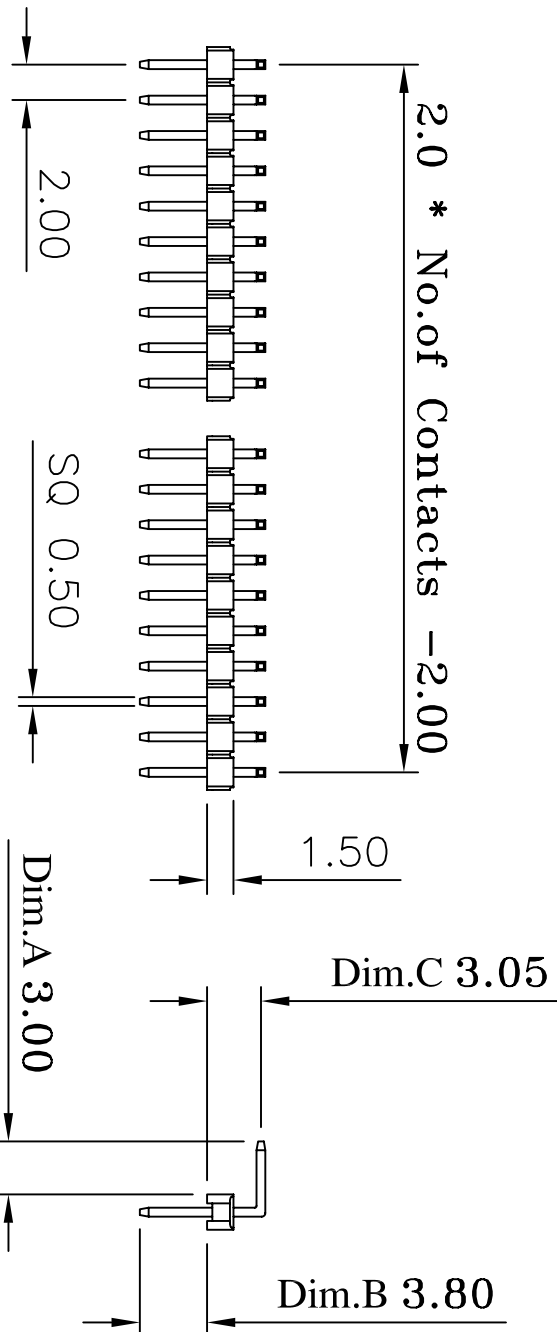

Recommended P.C. Board
 Hole Layout

- (RoHS Compliant)
- H2 N 15 X - 1 XX RZ BK X 000 X
 1 2 3 4 5 6 7 8
- Insulator Material:
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Blank= Brass
 - 3. Per Row 02~40 pin
 - 4. Tcoll Style:
 - RZ= Right Angle
 - Color: BK=Black
 - WH=White
 - Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash,Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Matte Tin 100u"
 - Special Options:
 - D=Gold 5u"
 - E=Gold 5u",Matte Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u",Matte Tin 100u"
 - L=Gold 15u"
 - M=Gold 15u",Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u",Matte Tin 100u"
 - Packaging:
 - A= PE Bag
 - D= Box

@: H2X15-1XXRZBKX000X-2008/05/14-C1 ①: H2X15-1XXRZBKX000-2007/11/26-C			
1:	H2N15-1XXBKHO	PART NO	H2N15X-1XXRZBKX000X
2:	QT-0.50X10.50BN	DRAWING NO	PHA-00227
3:	0	DRAWN BY	GARY
TEL:(02)86481727 FAX:(02)86482427		APPROVAL BY	
		EDITION:	G2
		SCALE:	1:1
		ITEM:	PHA
		UNIT:	m.m