

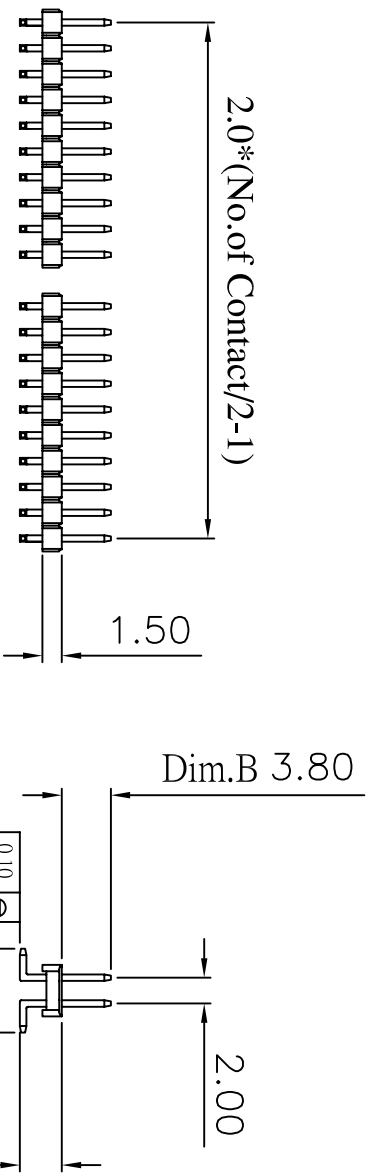


Current Rating: 2 Amps
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

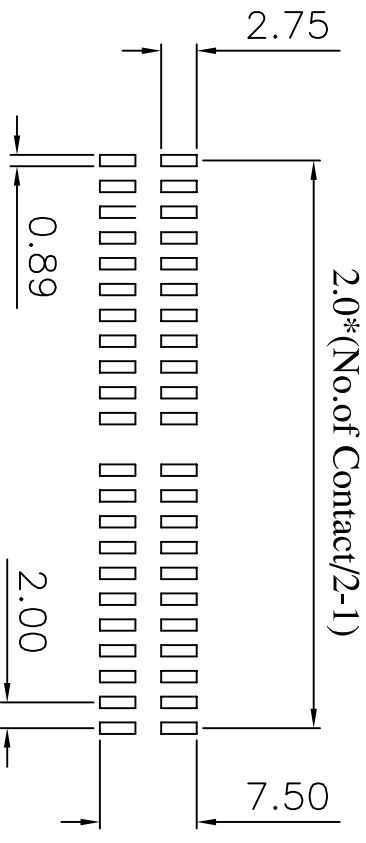

Finish: Tin, Gold Plated
Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

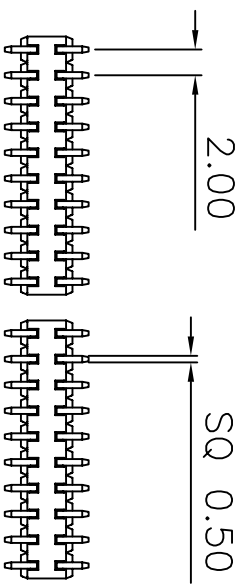

(RoHS Compliant) H2 N 15 X - 2 XX D0 BK X 000 X
 1 2 3 4 5 6 7 8

- Insulator Material:
 N= Nylon-6T
 P= Phosphor Bronze
 Blank=Brass
 Per Row 02~40 pin
 4. Tail Style:
 DO= S.M.D Type
 5. Color: BK=Black
 WH=White
- Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Bright Tin over Nickel
 C=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 B=Gold 3u",Matte Tin 100u"
- Special Options
 8. Packing:
 B= Tube
 D= Box

CONN TOP COMPONENT INC. TEL: (02)86481727 FAX: (02)86482427		①:H2N15-2XXXD0BKX000-2007/01/25-C	
PART NO	H2N15X-2XXXD0BKX000X	.X	.XXX
DRAWING NO	PHA-00067	±0.3	±0.100
DRAWN BY	GARY	EDITION: C1	ITEM: PHA
APPROVAL BY		2008/05/14	SCALE: 1:1
			UNIT: m.m