
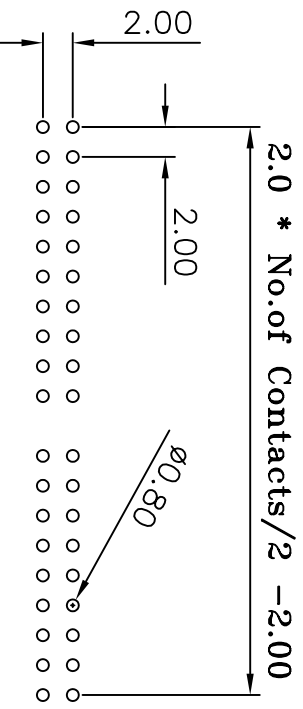


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

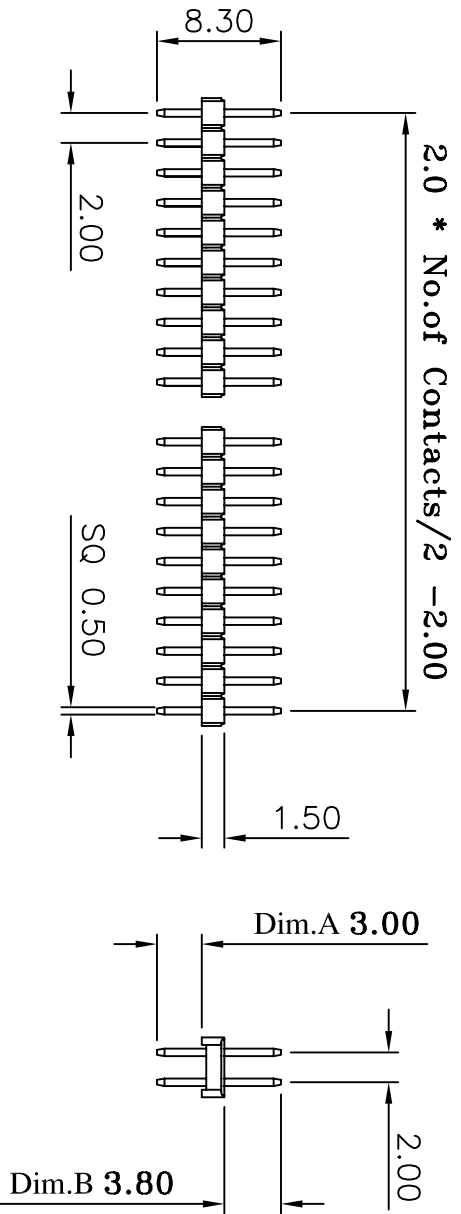

Recommended P.C. Board
 Hole Layout

- (RoHS Compliant)
- H2 N 15 X - 2 XX S0 BK X 000 X
1. Insulator Material: N= Nylon-6T
 P= Phosphor Bronze
 Blank= Brass
2. Per Row 02~40 pin
3. Tail Style: S0= Straight
4. Color: BK=Black
 WH=White
5. Contact Plated: T=Matte Tin over Nickel
 W=Matte Tin over Nickel
 Y=Bright Tin over Nickel
6. Contact Plated: D=Gold 5u"
 E=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
7. Special Options: A= PE Bag
 D= Box
8. Packing:

©:H2X15-2XXS0BKKX000X-2008/05/14-CI
 ©:H2X15-2XXS0BKKX000-2007/01/25-C

CONN TOP
 COMPONENT INC.

1: H2N15-2XXBKH0
 2: QT-0.50X8.30BN
 3: 0

TEL:(02)86481727 FAX:(02)86482427

PART NO	H2N15X-2XXS0BKKX000X	.X	.XXX
DRAWING NO	PHA-00063	±0.3	±0.100
DRAWN BY	GARY	EDITION: C2	ITEM: PHA
APPROVAL BY		2008/07/07	SCALE: 1:1
			UNIT: m.m