
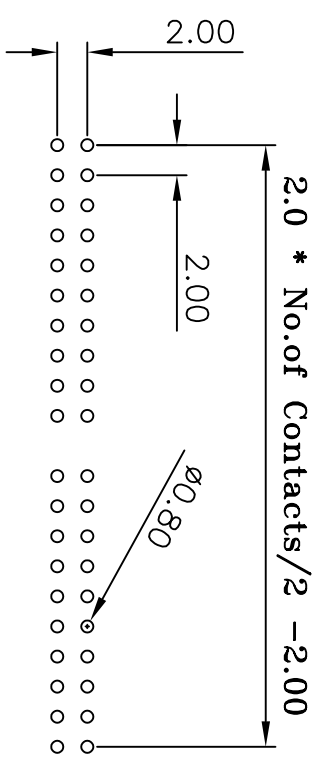


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

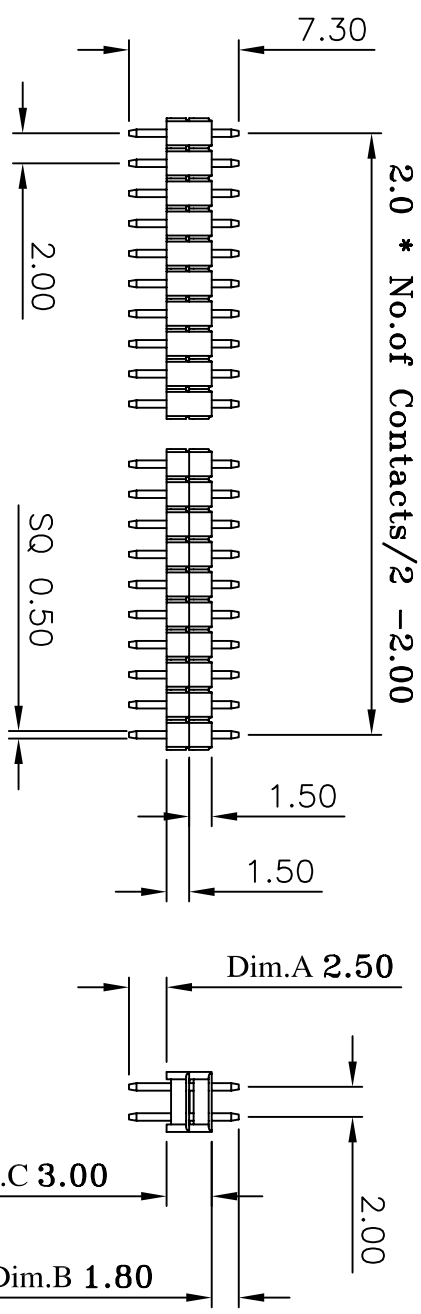

Recommended P.C. Board
 Hole Layout

(RoHS Compliant) H2 N 15 X - 2 XX S0 BK X D01 X

- Insulator Material:
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Blank= Brass
 - 3. Per Row 02~40 pin
 - 4. Taitl Style:
 - S0= Straight
 - 5. Color: BK=Black WH=White
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash,Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Matte Tin 100u"
- Special Options:
 - D=Gold 5u"
 - E=Gold 5u",Matte Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u",Matte Tin 100u"
 - L=Gold 15u"
 - M=Gold 15u",Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u",Matte Tin 100u"
- Packng:
 - A= PE Bog
 - D= Box

©:H2X15-2XXS0BKBKXD01X-2008/05/15-C1
 ©:H2X15-2XXS0BKBKXD01-2007/01/25-C

CONN TOP COMPONENT INC.

1: H2N15-2XXBKH0
 BOM 2: QT-0.50X7.30BN
 3: 0

TEL: (02)86481727 FAX: (02)86482427

PART NO	H2N15X-2XXS0BKBKXD01X	.X	.XXX
DRAWING NO	PHA-00086	±0.3	±0.100
DRAWN BY	GARY	EDITION: C2	ITEM: PHA
APPROVAL BY		2008/07/08	SCALE: 1:1
			UNIT: m.m