
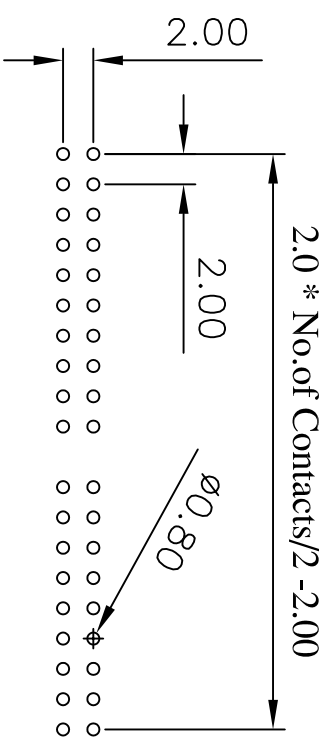
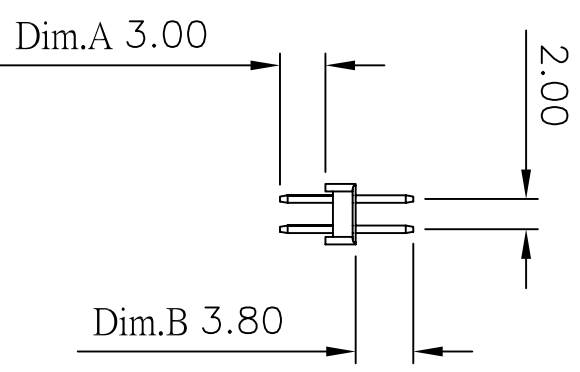
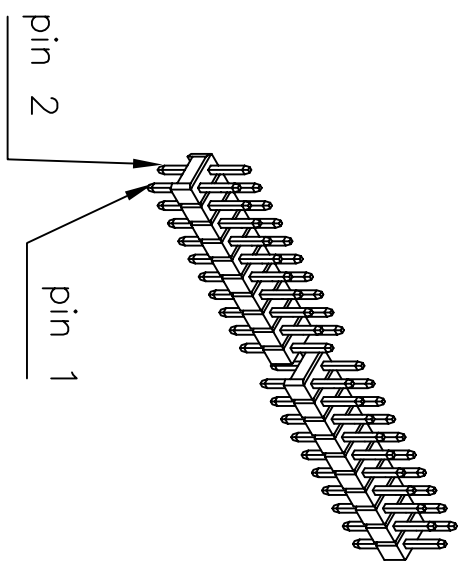
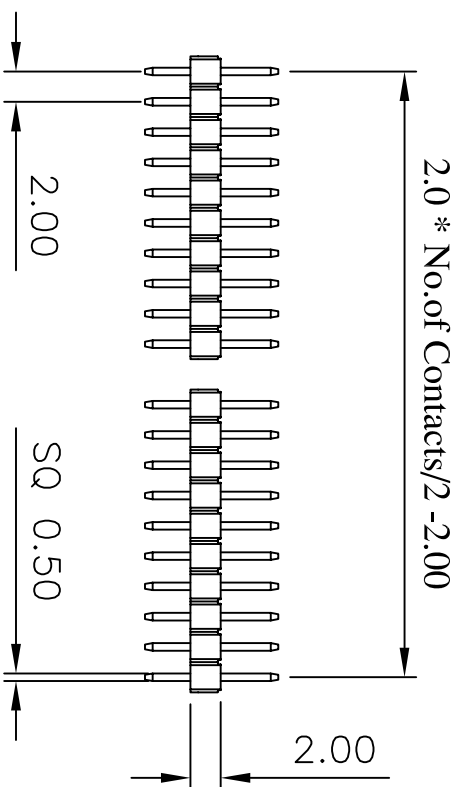


2.0*No.of Contacts/2 ±0.30

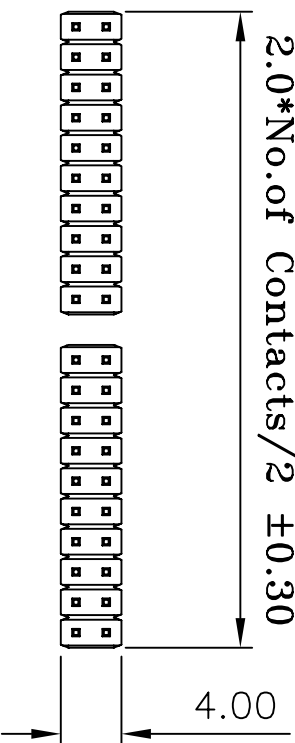

Recommended P.C. Board
Hole Layout

Current Rating: 2 Amps

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max

Dielectric Withstanding: 500 V AC

Operating Temperature: -40° ~ +105° C

Contact Material: Copper Alloy

Insulator Material: Polyester, UL 94V-0

Standard: PBT

Finish: Gold Plated or Duplex Plated

Standard: Gold Flash all over

Note:

Duplex Plating: Gold Plated on contact area,

Tin on solder area

Insulator Material: Polyester, UL 94V-0

Standard: Nylon-6T

Max Processing Temp: 230° C for 60 seconds

Max Processing Temp: 260° C for 10 seconds

- Insulator Material:
 - A= P.B.T
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Blank= Brass
 - 3. Per Row 02~40 pin
 - 4. Tulll Style:
 - S0= Straight
 - 5. Color: BK=Black
 - WH=White
- Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash,Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u" Matte Tin 100u"
- Special Options
 - D=Gold 5u"
 - E=Gold 5u" Matte Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u" Matte Tin 100u"
 - L=Gold 15u"
 - M=Gold 15u" Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u" Matte Tin 100u"
- Packing:
 - A= PE Bog
 - D= Box

(RoHS Compliant) H2 X 20 X - 2 XX S0 BK X 000 X

①:H2X20-2XXS0BKX000-2007/02/05-C

CONN TOP COMPONENT INC.	
1:	H2X20-2XXBKHO
2:	QT-0.50X8.80BN
3:	0

TEL:(02)86481727 FAX:(02)86482427

PART NO	H2X20X-2XXS0BKX000X	.X	.XX	.XXX
DRAWING NO	PHA-00005	±0.3	±0.20	±0.100
DRAWN BY	GARY		ITEM: PHA	
EDITION:	C1		SCALE: 1:1	
APPROVAL BY			UNIT: m.m	