



Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

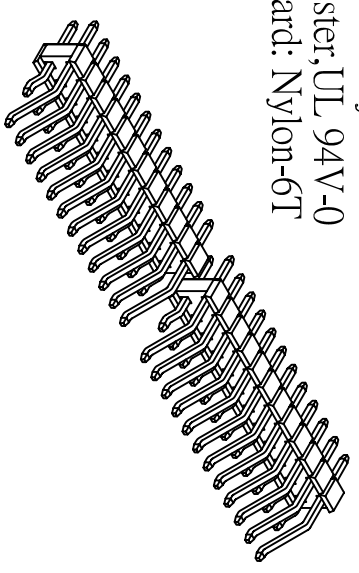

Recommended P.C. Board
 SMD Layout

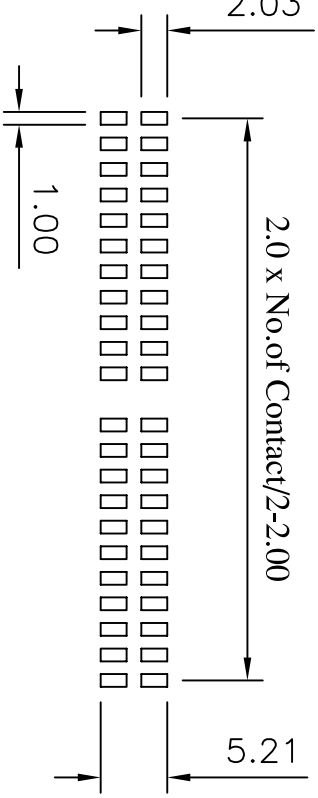

- (RoHS Compliant) H2 N 20 X - 2 XX SD BK X 000 X
- Insulator Material:
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Blank= Brass
 - 3. Per Row 02~40 pin
 - 4. Tail Style:
 - SD= R/A SMD
 - 5. Color: BK=Black
 - WH=White
 - Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - C=Gold Flash
 - F=Gold Flash,Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Matte Tin 100u"
 - Special Options
 - D=Gold 5u"
 - E=Gold 5u",Matte Tin 100u"
 - G=Gold 10u"
 - J=Gold 10u",Matte Tin 100u"
 - L=Gold 15u"
 - M=Gold 15u",Matte Tin 100u"
 - U=Gold 30u"
 - V=Gold 30u",Matte Tin 100u"
 - Packing:
 - A= PE Bog
 - B= Tube
 - D= Box

		PART NO H2N20X-2XXXSDBKX000X X ±0.3 .XX ±0.20 .XXX ±0.100	
①:H2N20-2XXXSDBKX000-2007/02/05-C		DRAWING NO PHA-00073 EDITION: C1 SCALE: 1:1	
BOM 1: H2N20-2XXXBKH0 2: QT-0.50X8.20BN 3: QT-0.50X12.50BN		DRAWN BY GARY 2009/02/13	
TEL:(02)86481727 FAX:(02)86482427		APPROVAL BY	
		UNIT: m.m	