


Current Rating: 2 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area

Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Recommended P.C. Board
 SMD Layout

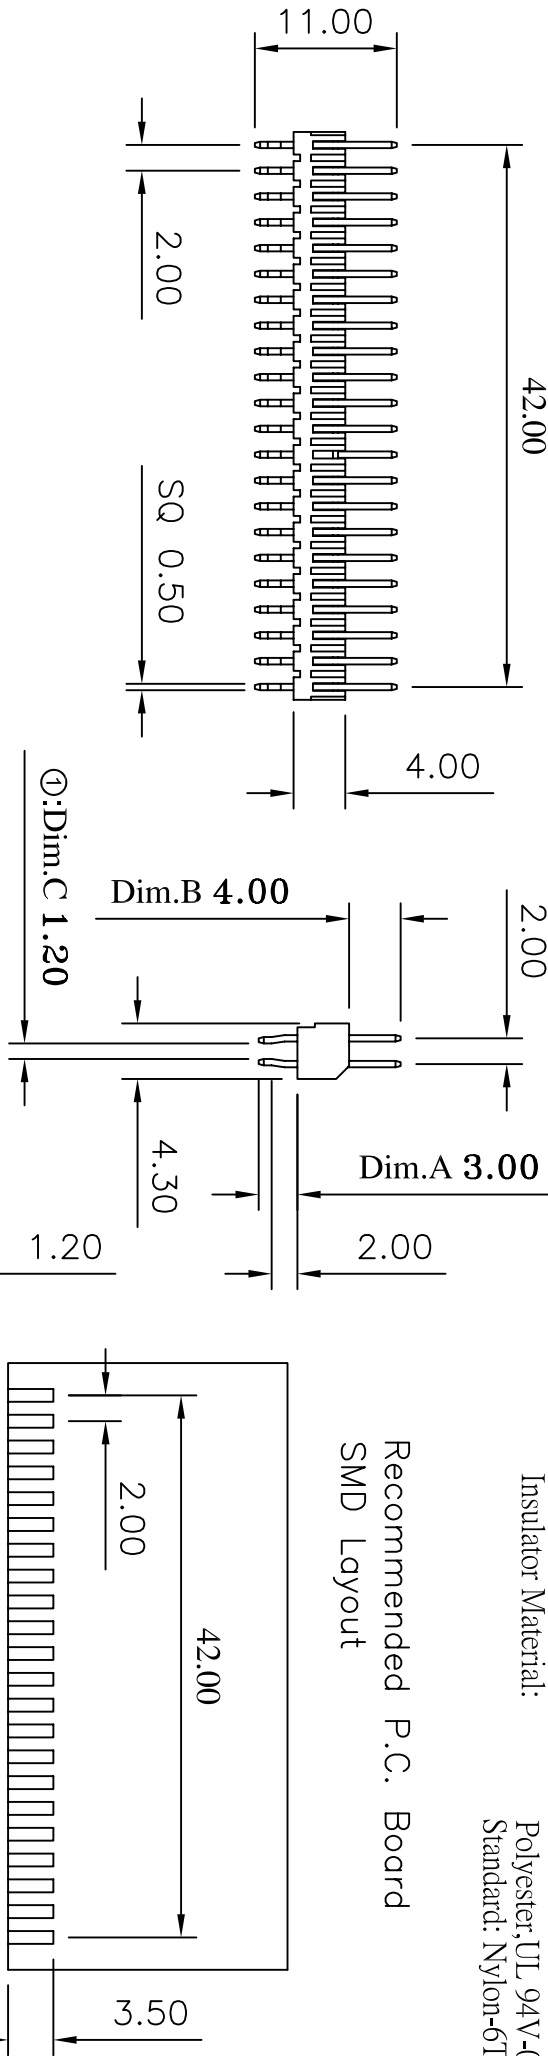

(RoHS Compliant) H2 X 43 X - 2 22 SK BK X E01 X
 1 2 3 4 5 6 7 8

- Insulator Material: 5. Contact Plated:
 - A= P.B.T
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Blank= Brass
 - Circuits: 44 pin
 - Toill Style: SK= Straight W/Kink
 - Color: BK=Black
 - WH=White
1. Insulator Material: 5. Contact Plated:
 - T=Matte Tin over Nickel
 - W=Matte Tin over Nickel 150u"
 - Y=Bright Tin over Nickel
 - O=Gold Flash
 - F=Gold Flash,Matte Tin 100u"
 - A=Gold 3u"
 - B=Gold 3u",Matte Tin 100u"
6. E01=20, Not insert pin
7. Packings:
 - A= Bog
 - D= Box

①:Dim.C 1.00-2008/03/27-C		CONN TOP COMPONENT INC.	
PART NO	H2X43X-222SKBXE01X	.X	.XXX
DRAWING NO	PHA-00243	±0.3	±0.20
DRAWN BY	GARY	EDITION: C1	ITEM: PHA
APPROVAL BY		2008/04/01	SCALE: 1:1
TEL:(02)86481727 FAX:(02)86482427		UNIT: m.m	