






A Type

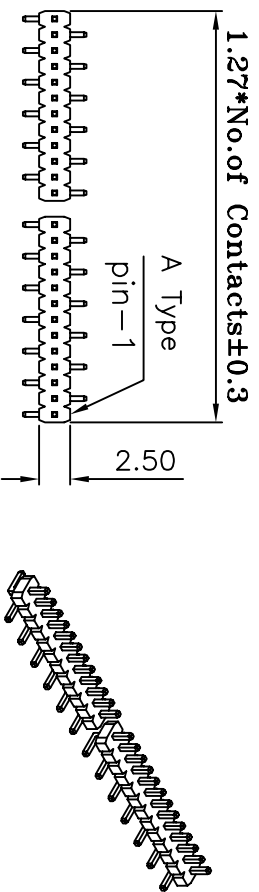

B Type



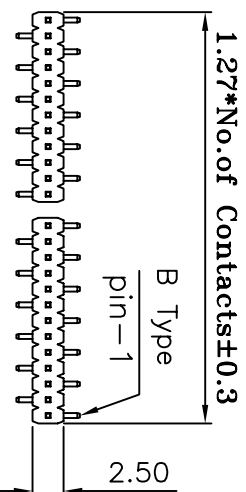


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over
 Standard: Nylon-6T

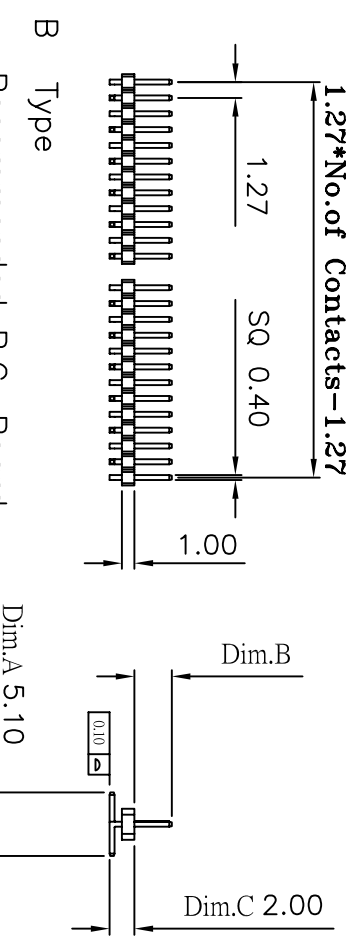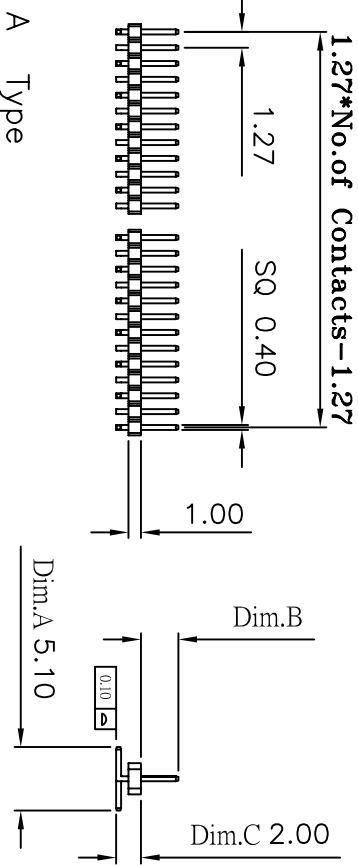

A Type
 Recommended P.C. Board
 SMD Layout

B Type
 Recommended P.C. Board
 SMD Layout

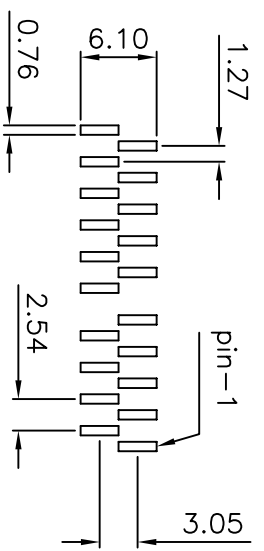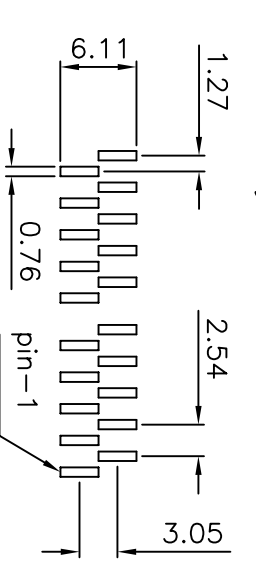

(RoHS Compliant) H3 N 10 X - 1 XX DX BK X 000 B
 1 2 3 4 5 6 7 8

- Insulator Material:
 - N= Nylon-6T
 - P= Phosphor Bronze
 - Per Row 03~50 pin
- Tail Style:
 - DA= S.M.D A Type
 - DB= S.M.D B Type
- Contact Plated:
 - C=Gold Flash
 - A=Gold 3u"
 - D=Gold 5u"
 - G=Gold 10u"
 - L=Gold 15u"
 - U=Gold 30u"
- Special Options:
 - B= Tube

CONN TOP COMPONENT INC.			
1:	H2N10-1XXXBKH0	DRAWING NO	PHB-00029
2:	QT-0.40X XXXBN	DRAWN BY	GARY
3:	0	APPROVAL BY	
PART NO		H3N10X-1XXXDXBKX000B	X ±0.3
DRAWING NO		PHB-00029	XX ±0.20
EDITION:		C1	XXX ±0.100
SCALE:		1:1	ITEM: PHB
UNIT:		m.m	

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N10X-1XXXDXBKX001B	5.10mm	3.00mm	2.00mm
H3N10X-1XXXDXBKX002B	5.10mm	1.80mm	2.00mm

TEL:(02)86481727 FAX:(02)86482427