



**1.27\*No.of Contacts-1.27**

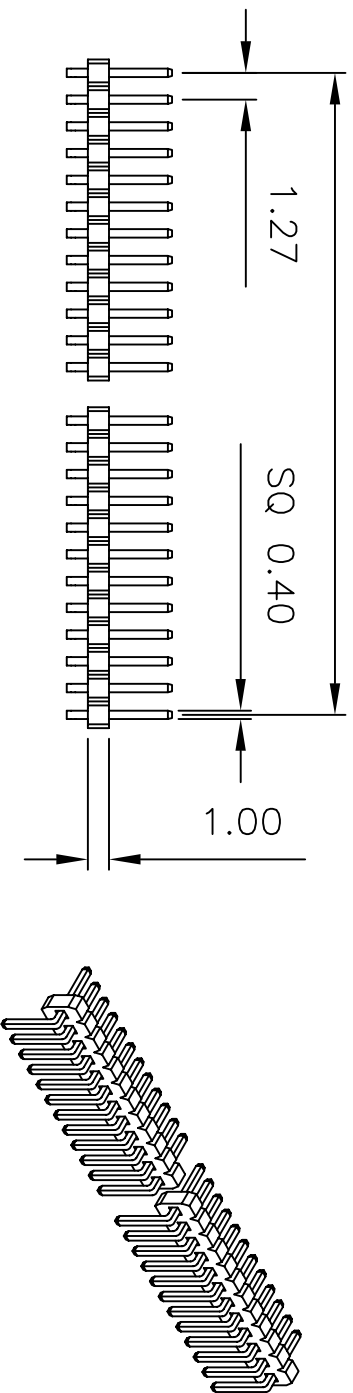


**1.27\*No.of Contacts±0.3**

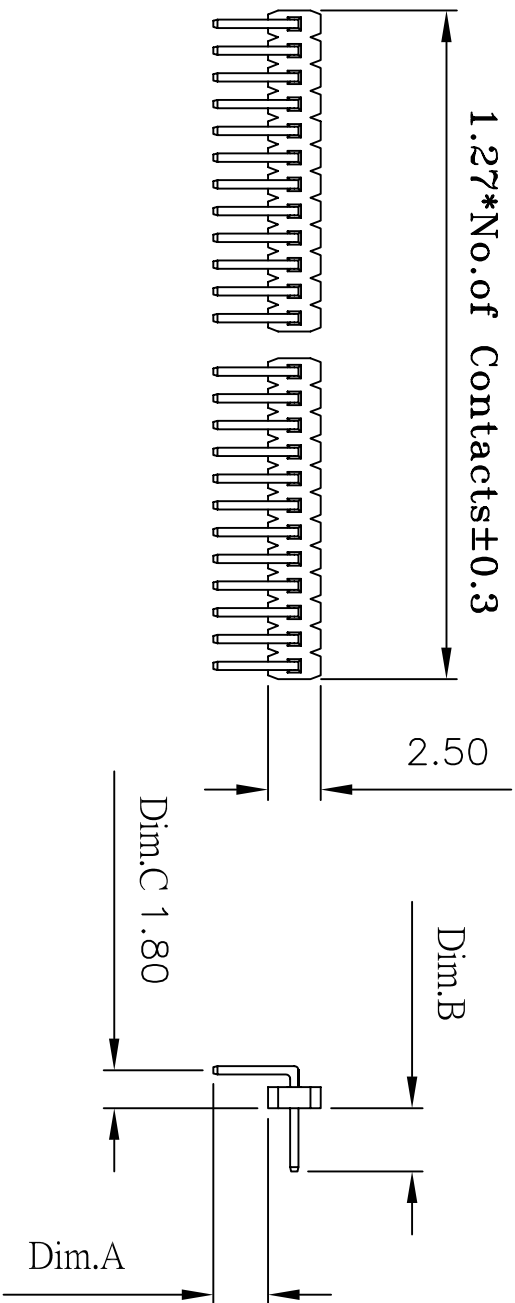

Recommended P.C. Board  
Hole Layout

Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: -40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Finish: Tin, Gold Plated  
 Standard: Gold Flash all over  
 Standard: Nylon-6T

**1.27\*No.of Contacts-1.27**

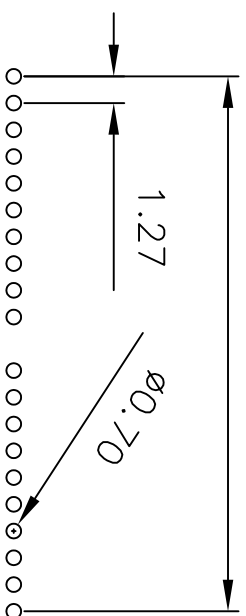

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N10X-1XXR0BKX001X	2.60mm	3.00mm	1.8mm
H3N10X-1XXR0BKX002X	2.60mm	1.80mm	1.8mm
H3N10X-1XXR0BKX003X	1.50mm	3.00mm	1.8mm
H3N10X-1XXR0BKX004X	1.50mm	1.80mm	1.8mm

(RoHS Compliant) H3 N 10 X - 1 XX R0 BK X 000 X

1 2 3 4 5 6 7 8

- Insulator Material: Nylon-6T  
N= Nylon-6T
- P= Phosphor Bronze  
Blank=Brass
- Per Row 02~50 pin
- Tail Style: RO= Right Angle
- Color: BK=Black  
WH=White
- Contact Plated: C=Gold Flash  
A=Gold 3u"  
D=Gold 5u"  
G=Gold 10u"  
L=Gold 15u"  
U=Gold 30u"
- Special Options: A= PE Bag  
B= Tube  
D= Box
- Packing:



CONN TOP  
COMPONENT INC.

1: H3N10-1XXBKH0  
 2: QT-0.40X XXXBN  
 3: 0  
 TEL: (02)86481727 FAX: (02)86482427

PART NO H3N10X-1XXR0BKX000X .X ±0.3 .XX ±0.20 .XXX ±0.100

DRAWING NO PHB-00031 EDITION: C1 ITEM: PHB

DRAWN BY GARY 2009/01/16 SCALE: 1:1

APPROVAL BY UNIT: m.m