
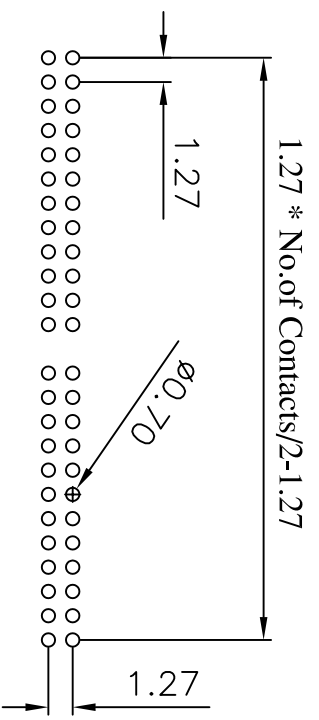
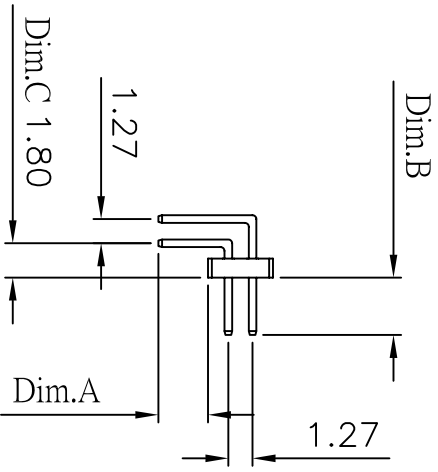


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

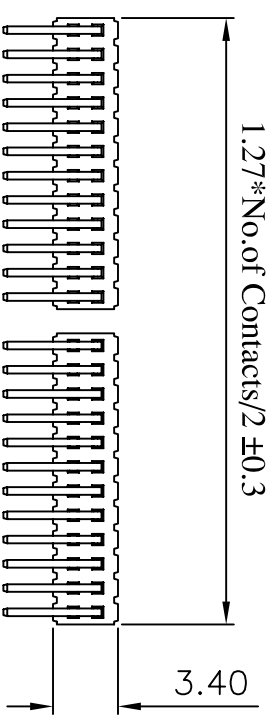

(RoHS Compliant) H3 N 10 X - 2 XX R0 BK X 000 X
 1 2 3 4 5 6 7 8

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N10X-2XXR0BKX001X	2.60mm	3.00mm	1.8mm
H3N10X-2XXR0BKX002X	2.60mm	1.80mm	1.8mm
H3N10X-2XXR0BKX003X	1.50mm	3.00mm	1.8mm
H3N10X-2XXR0BKX004X	1.50mm	1.80mm	1.8mm

- Insulator Material:
 - N= Nylon-6T
- P= Phosphor Bronze
 - Blank=Brass
- Per Row 02~50 pin
- Tail Style:
 - R0= Right Angle
- Contact Plated:
 - C=Gold Flash
 - A=Gold 3u"
 - D=Gold 5u"
 - G=Gold 10u"
 - L=Gold 15u"
 - U=Gold 30u"
- Special Options
 - A= PE Bag
 - B= Tube
 - D= Box
- Special Options
- Packing:

1: H3N10-2XXBKHX0		DRAWING NO	
2: QT-0.40X XXBN		PHB-00032	
3: QT-0.40X XXBN		DRAWN BY	
		GARY	
		EDITION: C1	
		2009/01/19	
		SCALE: 1:1	
		APPROVAL BY	
		UNIT: m.m	

TEL: (02)86481727 FAX: (02)86482427
 H3N10-2XXR0BKX000-2007/02/13-C