



(RoHS Compliant) H3 B 10 X - 2 XX D0 BK X D01 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N= Nylon-9T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
D0= S.M.D No Prg Type
- Color: BK=Black
WH=White
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options:
E = CAP + Tap & Reel
F = CAP + Tube
G = CAP + Tray
H = CAP + Bog

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-9T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

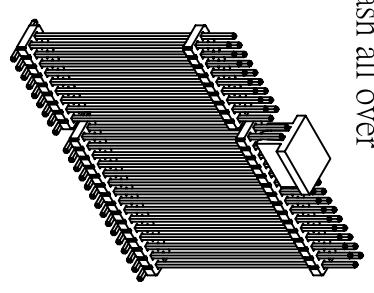

Recommended P.C. Board
 SMD Layout

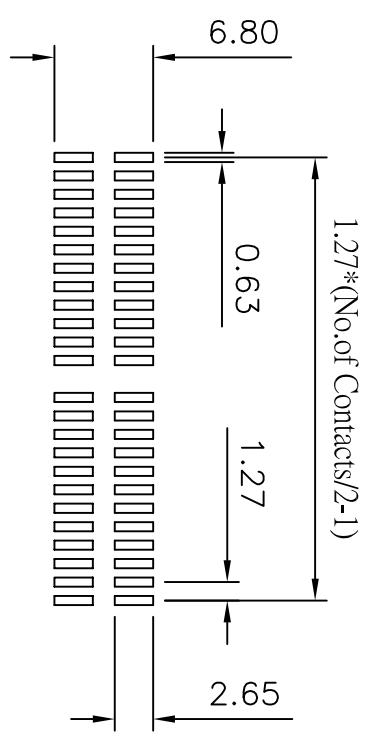

CONN TOP COMPONENT INC.		PART NO H3B10X-2XXXD0BKXD01X		.X ±0.3	
H3B10-2XXXBKH0		PHB-00114		.XX ±0.20	
QT-0.40X29.60BN		EDITION: C1		.XXX ±0.100	
CAP-PHB02		2009/01/19		ITEM: PHB	
DRAWN BY GARY		SCALE: 1:1		UNIT: m.m	
APPROVAL BY					
TEL: (02)86481727 FAX: (02)86482427					