



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester; UL 94V-0
 Standard: Nylon-6T

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

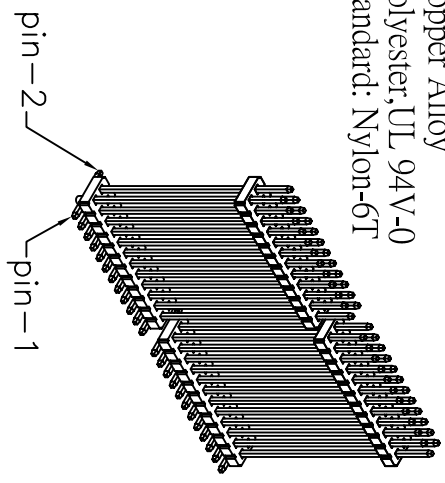


Recommended P.C. Board
 SMD Layout

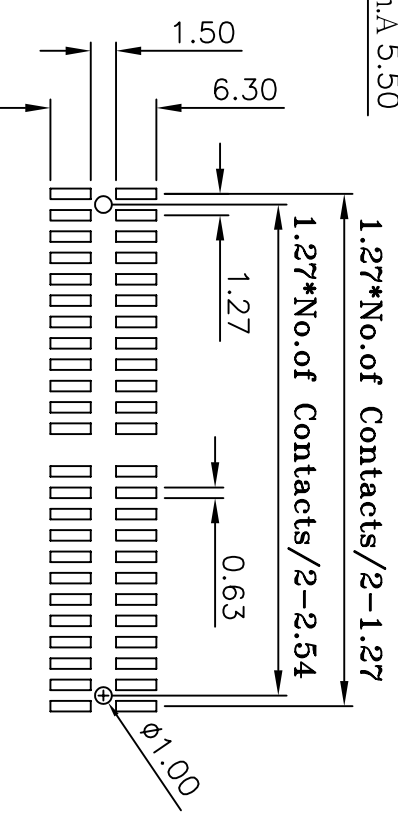

(RoHS Compliant) H3 N 10 X - 2 XX D1 BK X D02 D
 1 2 3 4 5 6 7 8

- Insulator Material: Nylon-6T
- P = Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style: D1 = S.M.D With Peg Type
- Color: BK=Black
WH=White
- Contact Plated: C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options: D = Box
- Packing: D = Box

 CONN TOP COMPONENT INC. ①:H3B10-2XXD1BKXXD02-2008/01/04-C		PART NO		H3N10X-2XXD1BKXXD02D	.X	.XX	.XXX
1:	H3N10-2XXBKH1	DRAWING NO	PHB-00184	EDITION:	C1	ITEM:	PHB
2:	H3N10-2XXBKH0	DRAWN BY	GARY	2009/01/19	SCALE:	1:1	
3:	QT-0.40X23.50BN	APPROVAL BY				UNIT:	m.m
TEL: (02)86481727 FAX: (02)86482427							