


Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: -40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Finish: Tin, Gold Plated
Standard: Gold Flash all over
Standard: Nylon-6T

Recommended P.C. Board Hole Layout

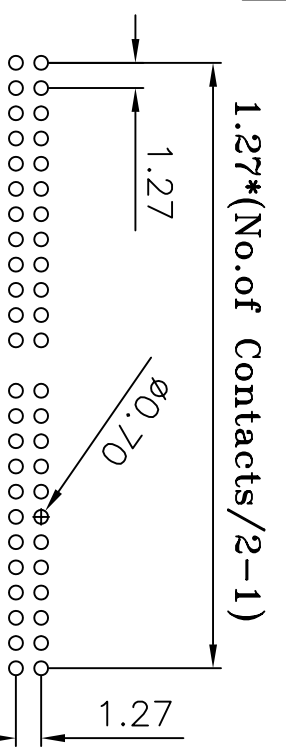

(RoHS Compliant) H3 N 10 X - 2 XX R0 BK X D01 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N= Nylon-6T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
R0= Right Angle
- Color: BK=Black
WH=White
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options
A= PE Bag
D= Box
- Packing:
A= PE Bag
D= Box

①:H3N10-2XXXR0BKXXD01-2007/05/18-C

CONN TOP COMPONENT INC.	
1:	H3N10-2XXXBK1H0
2:	QT-0.40X12.30BN
3:	QT-0.40X14.80BN

TEL:(02)86481727 FAX:(02)86482427

PART NO	H3N10X-2XXXR0BKXXD01X	.X	.XX	.XXX
DRAWING NO	PHB-00153	±0.3	±0.20	±0.100
DRAWN BY	GARY	EDITION: C1	SCALE: 1:1	ITEM: PHB
APPROVAL BY		2009/01/19		UNIT: m.m