
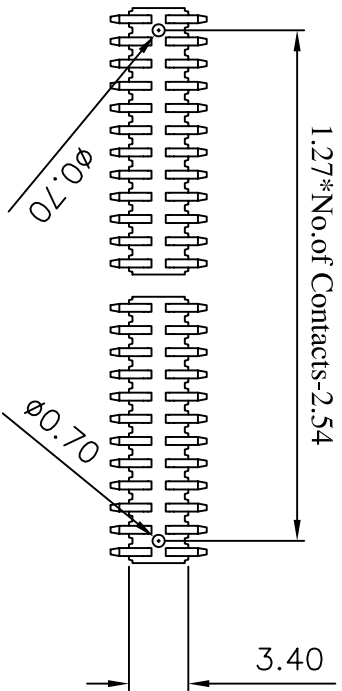
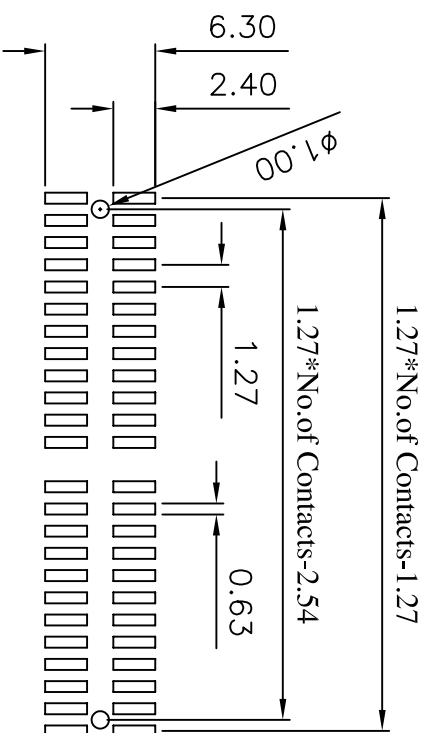
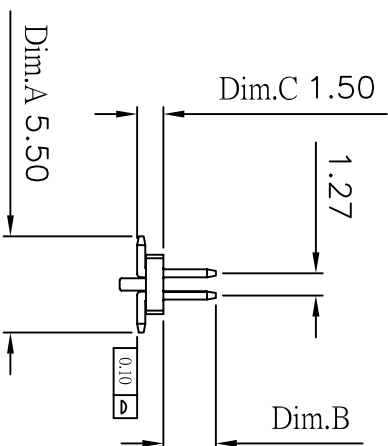


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over
 Standard: Nylon-6T

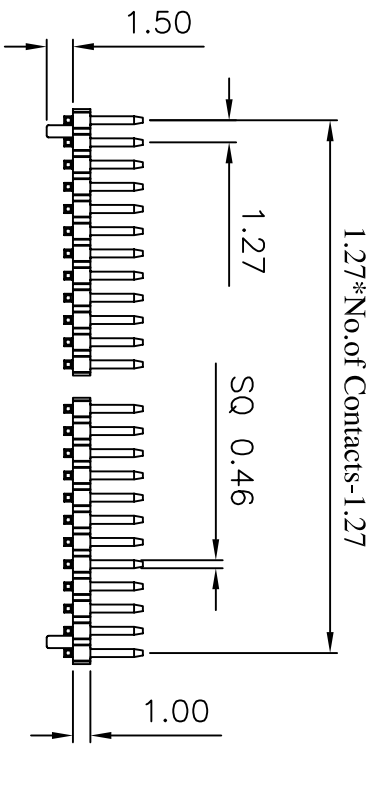

(RoHS Compliant) H3 N 10 A X - 2 XX D1 BK X 000 B
 1 2 3 4 5 6 7 8

- Insulator Material:
N = Nylon-6T
- P = Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
D1 = S.M.D With Peg Type
- Color: BK=Black
WH=White
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options
B = Tube
- Packing:
B = Tube

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N10AX-2XXD1BKX001B	5.50mm	3.00mm	1.50mm
H3N10AX-2XXD1BKX002B	5.50mm	1.80mm	1.50mm

①:H3N10A-2XXD1BKX000-2007/02/27-C



CONN TOP
COMPONENT INC.

PART NO H3N10AX-2XXD1BKX000B

.X .XX .XXX
±0.3 ±0.20 ±0.100

1: H3N10A-2XXBKHO

DRAWING NO PHB-00060

EDITION: C1

ITEM: PHB

2: QT-0.46X XXBN

DRAWN BY GARY

2009/01/21

SCALE: 1:1

3: 0

APPROVAL BY

UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427