



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

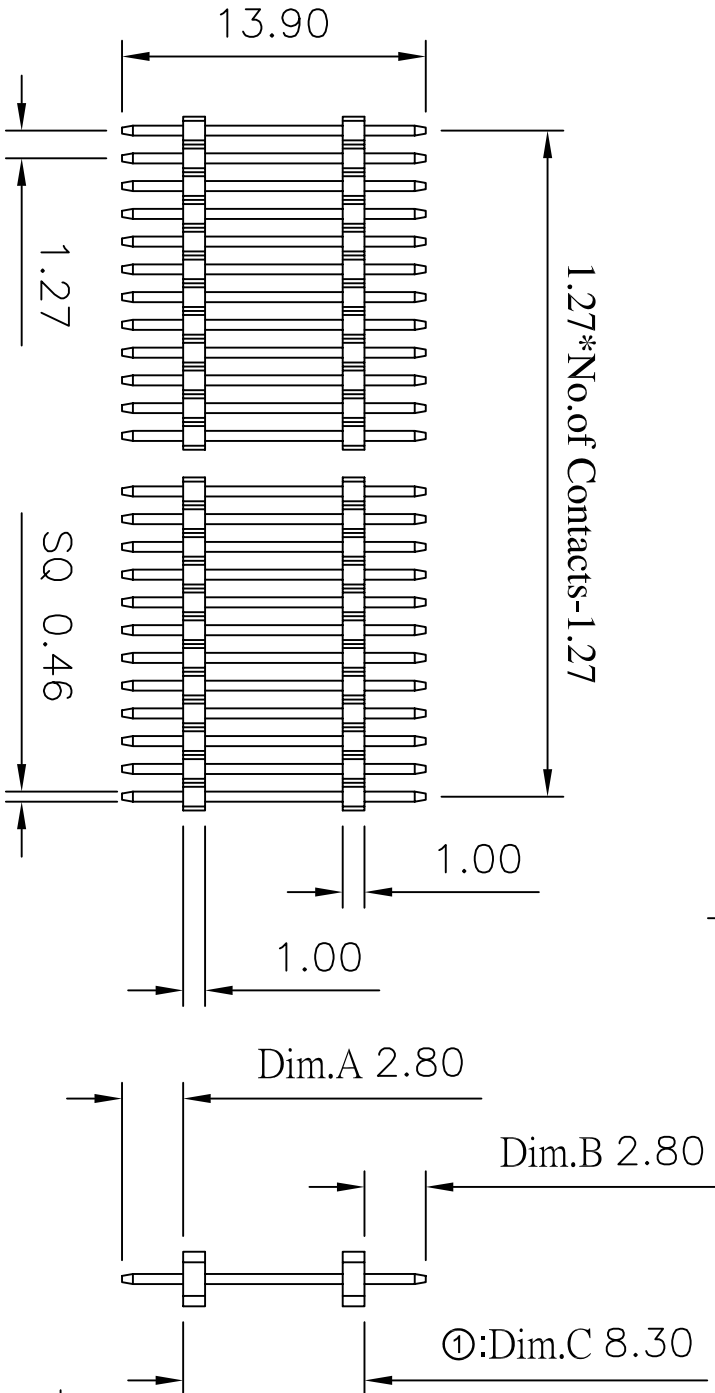

Recommended P.C. Board
 Hole Layout

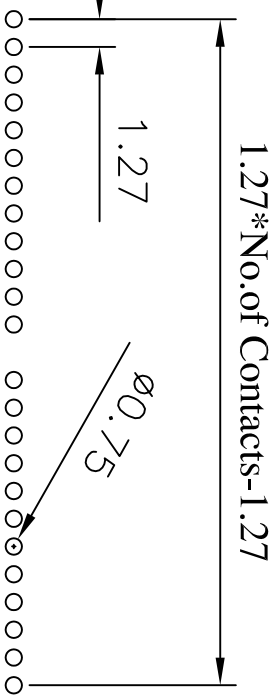

(RoHS Compliant) H3 N 10 A X - 1 XX S0 BK X D01 X
 1 2 3 4 5 6 7 8

- Insulator Material:
N= Nylon-6T
- P= Phosphor Bronze
Blank=Brass
- Per Row 02~50 pin
- Tail Style:
S0= Straight
- Color: BK=Black
WH=White
- Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u"
- Special Options:
A= PE Bag
D= Box

①:Dim.C6,30-2007/08/28-C

②:H3N10A-1XXXS0BKXD01-2007/09/03-C1

1:	H3N10A-1XXXBKH0
2:	QT-0.46X13.90BN
3:	0

CONN TOP COMPONENT INC.		PART NO	H3N10AX-1XXXS0BKXD01X	.X	.XX	.XXX
BOM 1:	H3N10A-1XXXBKH0	DRAWING NO	PHB-00163	±0.3	±0.20	±0.100
BOM 2:	QT-0.46X13.90BN	DRAWN BY	GARY	EDITION: C2	SCALE: 1:1	ITEM: PHB
BOM 3:	0	APPROVAL BY				UNIT: m.m

TEL: (02)86481727 FAX: (02)86482427